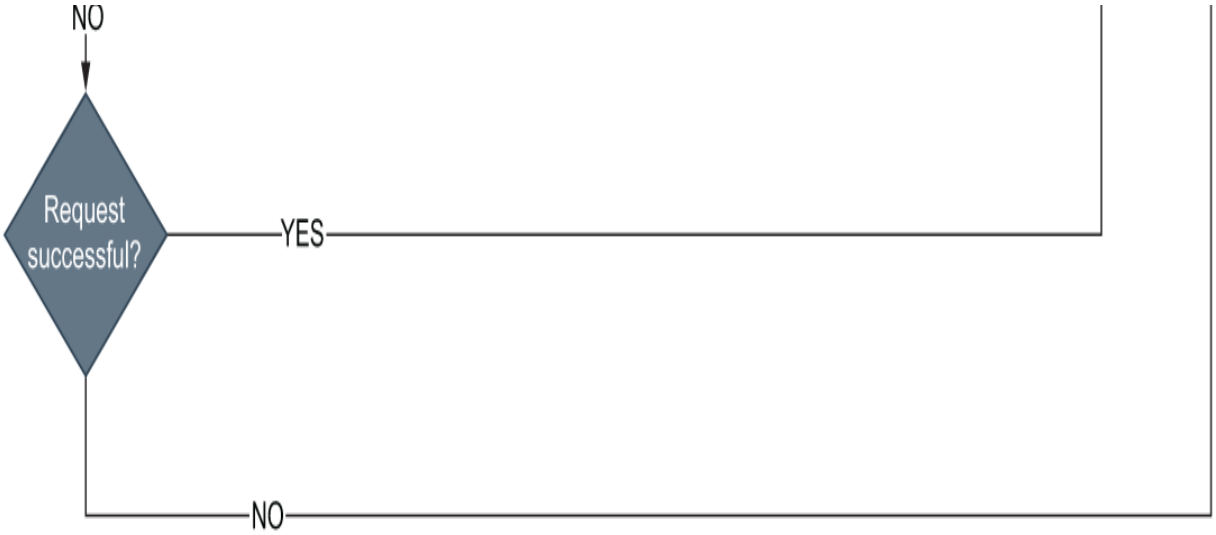


Figure 9.5 When multiple resilience patterns are implemented, they are applied in a specific sequence.

You can verify the result of applying these patterns to Edge Service by using a tool like Apache Benchmark (https://httpd.apache.org/docs/2.4/programs/ab.xhtml). If you're using macOS or Linux, you might have this tool already installed. Otherwise, you can follow the instructions on the official website and install it.

Make sure both Catalog Service and Order Service are not running so that you can test circuit breakers in a failure scenario. Then enable debug logging for Resilience4J so you can follow the state transitions of the circuit breaker. At the end of the application.yml file in your Edge Service project, add the following configuration.

Listing 9.10 Enabling debug logging for Resilience4J

```
logging:
  level:
    io.github.resilience4j: DEBUG
```