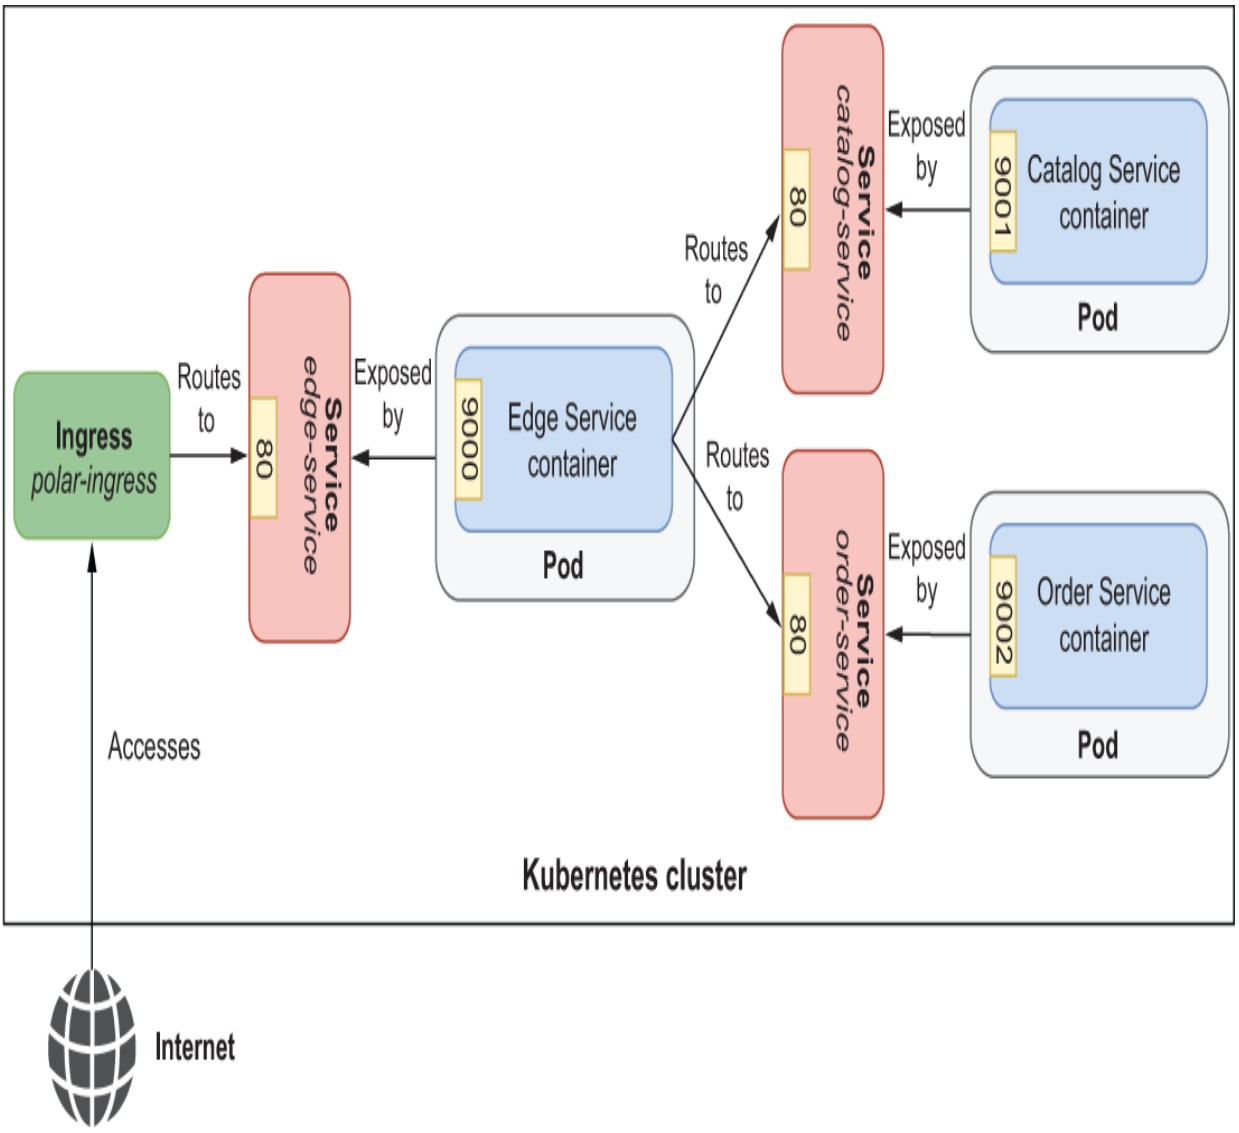


Figure 9.6 The deployment architecture of the Polar Bookshop system after introducing an Ingress to manage external access to the cluster

Let’s define an Ingress to route all HTTP traffic coming from outside the cluster to Edge Service. It’s common to define Ingress routes and configurations based on the DNS name used to send the HTTP request. Since we are working locally, and assuming we don’t have a DNS name, we can call the external IP address provisioned for the Ingress to be accessible from outside the cluster. On Linux, you can use the IP address assigned to