we'll do for Dispatcher Service. Figure 10.9 shows a model of a Spring Boot application using Spring Cloud Stream.

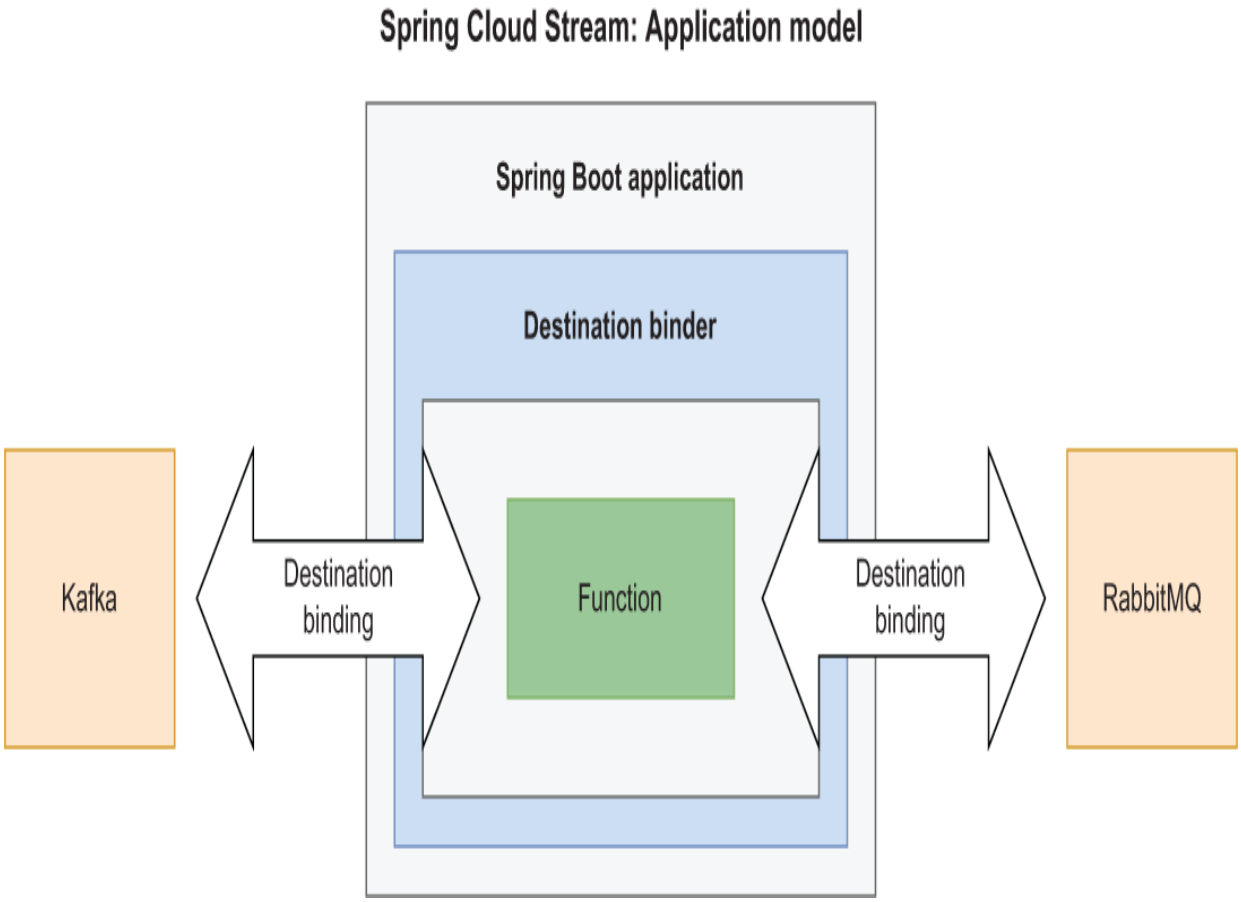


Figure 10.9 In Spring Cloud Stream, a destination binder provides integration with external messaging systems and establishes message channels with them.

Once you have defined the business logic of your application as functions, and you've configured Spring Cloud Function to manage them (like we did for Dispatcher Service), you can expose the functions through a message broker by adding a dependency on the Spring Cloud Stream binder project specific to the broker you want to use. I'll show you how to work with RabbitMQ both for input and output message channels, but you can also bind to multiple messaging systems within the same application.