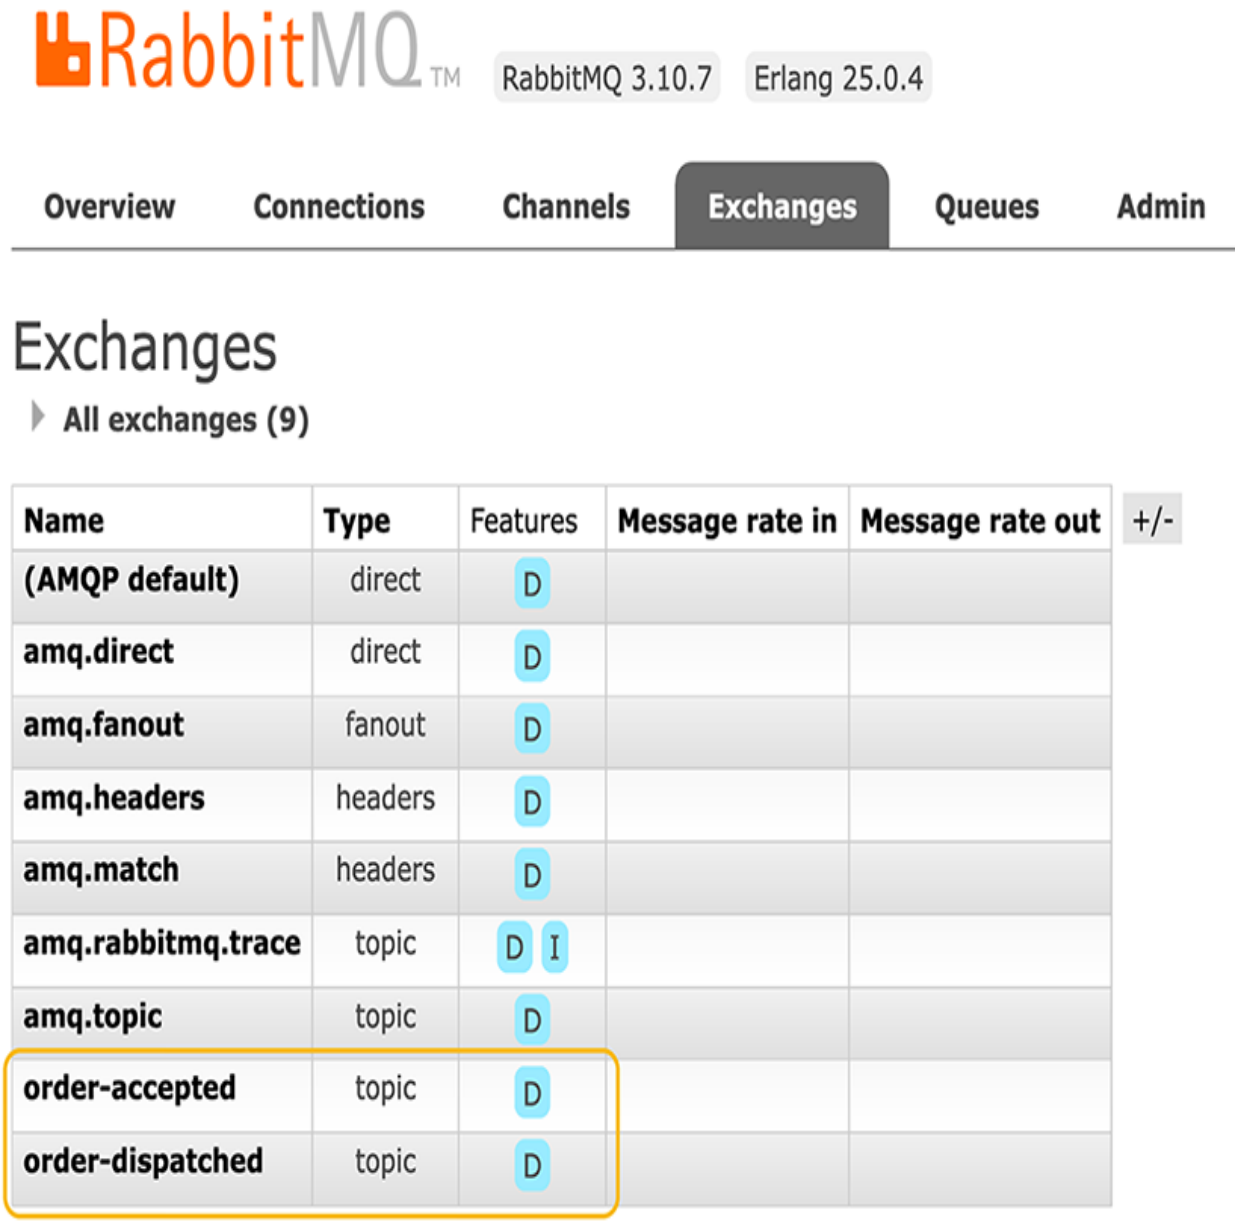


Figure 10.12 Spring Cloud Stream maps the two destination binding to two exchanges in RabbitMQ.

Next, let's take a look at the queues. In Dispatcher Service we configured a `packlabel-in-0` binding and a consumer group. That's the only input channel for the application, so it should result in a single queue. Let's verify that. In the RabbitMQ management console, as illustrated in figure 10.13,