you can see a durable `order-accepted.dispatcher-service` queue in the Queues section.

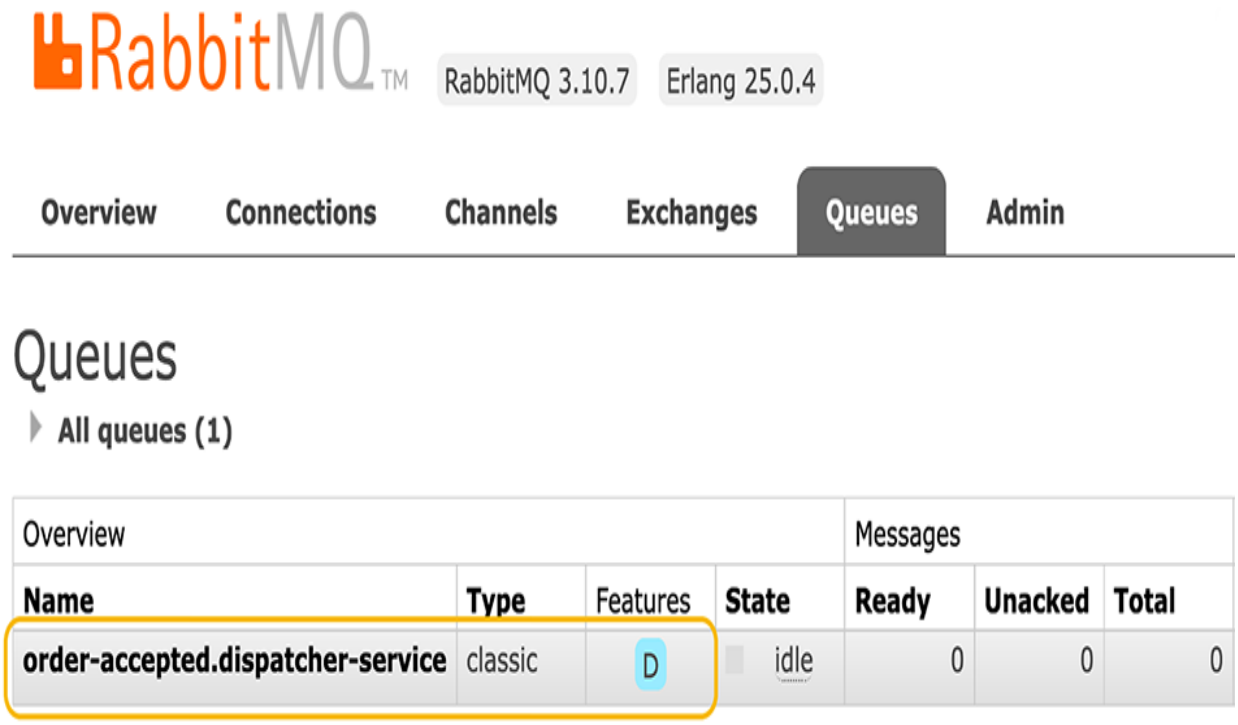


Figure 10.13 Spring Cloud Stream maps each input binding to a queue, named according to the configured consumer group.

NOTE No queue has been created for the `packlabel-out-0` binding because no consumer subscribed to it. Later you'll see that a queue will be created after configuring Order Service to listen to it.

We can verify that the integration works by manually sending a message to the `order-accepted` exchange. If everything is configured correctly, Dispatcher Service will read the message from the `order-accepted.dispatcher-service` queue, process it through the composed function `pack|label`, and finally send it to the `order-dispatched` exchange.