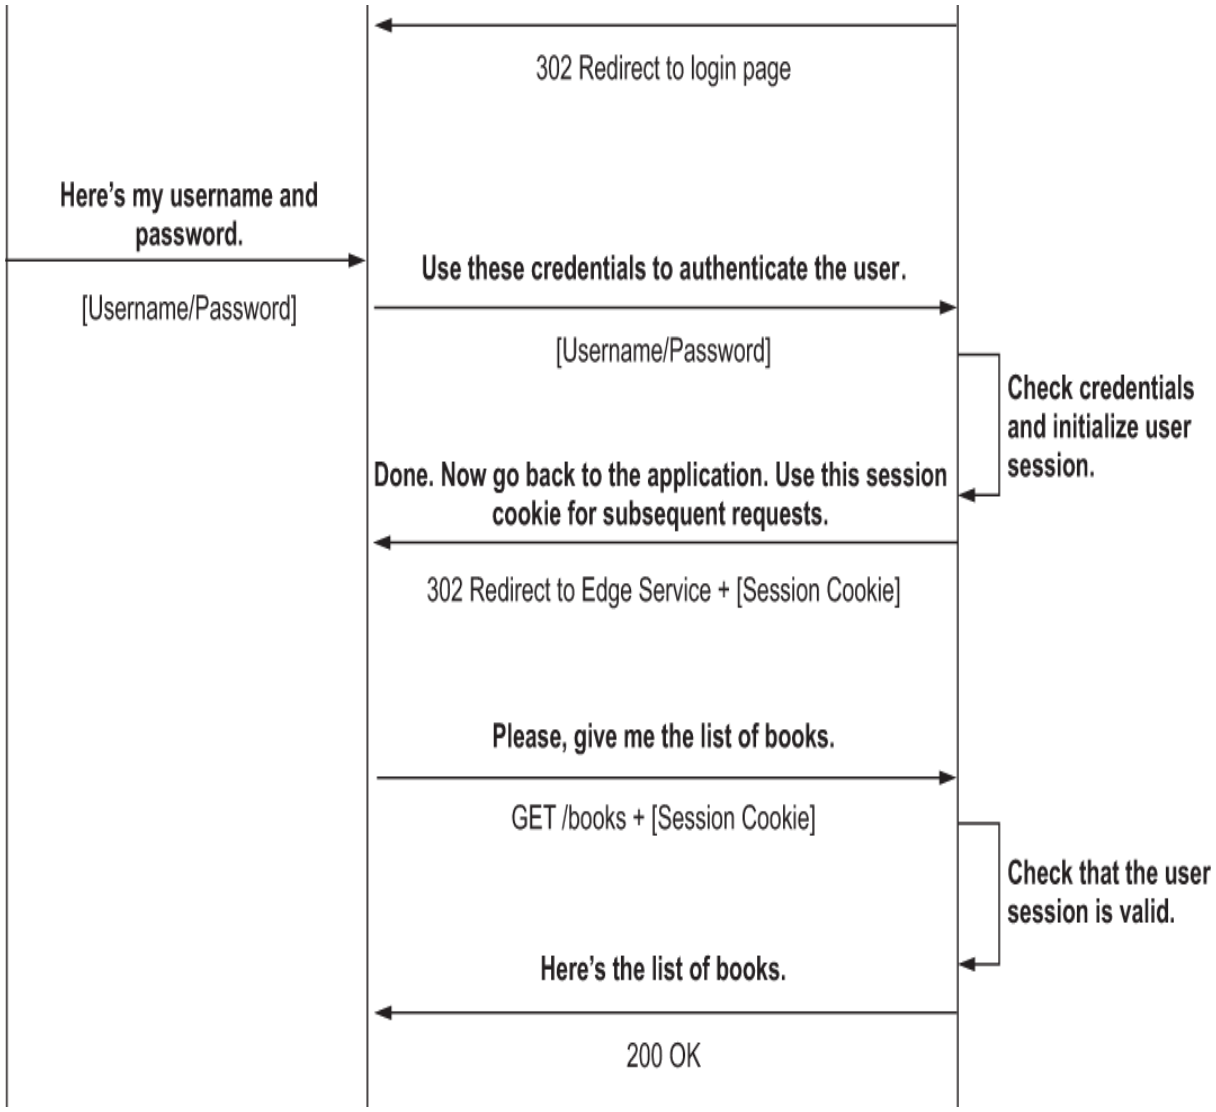


Figure 11.1 After the login step, the user session is kept alive through a session cookie.

When you are done testing the application, terminate the process with Ctrl-C. Then navigate to the folder where you keep your Docker Compose file (polar-deployment/docker/docker-compose.yml), and run the following command to stop the Redis container:

```
$ docker-compose down
```