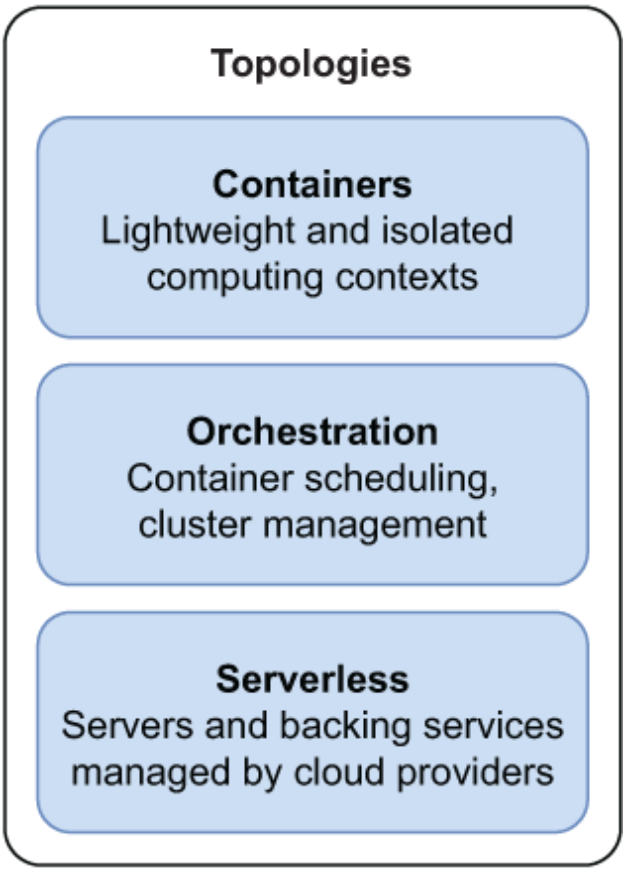


Figure 1.9 The main cloud native computing models are containers (managed by orchestrators) and serverless.

1.6.1 Containers

Imagine you join a team and start working on an application. The first thing you do is follow a guide to set up your local development environment that's similar to the ones used by your colleagues. You develop a new feature and then test it in a quality assurance (QA) environment. Once it's verified, the application can be deployed to staging for some extra testing and finally to production. The application is built to run in an environment with specific characteristics, so it's essential to have all the different environments as similar as possible. How would you do that? That's where containers enter the scene.