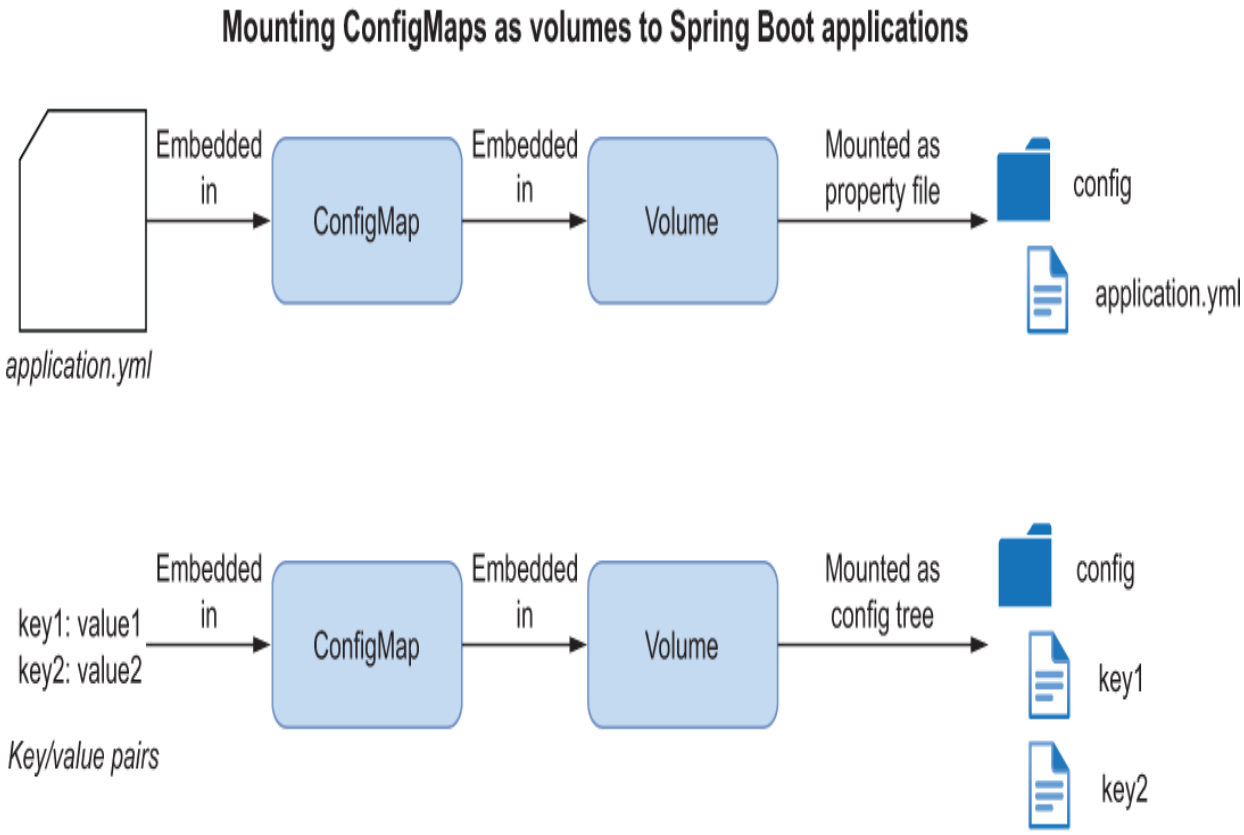


Figure 14.2 ConfigMaps mounted as volumes can be consumed by Spring Boot as property files or as config trees.

When configuring Spring Boot applications, the first option is the most convenient, since it uses the same property file format used for the default configuration inside the application. Let's see how we can mount the ConfigMap created earlier into the Catalog Service container.

Open the Catalog Service project (catalog-service), and go to the deployment.yml file in the k8s folder. We need to apply three changes:

- Remove the environment variables for the values we declared in the ConfigMap.
- Declare a volume generated from the `catalog-config` ConfigMap.