window, run the following command to deploy Quote Function. The container image is the one published by the commit stage workflow we defined before. Remember to replace `<your_github_username>` with your GitHub username in lowercase:

```
$ kn service create quote-function \
    --image ghcr.io/<your_github_username>/quote-function \
    --port 9102
```

You can refer to figure 16.3 for a description of the command.

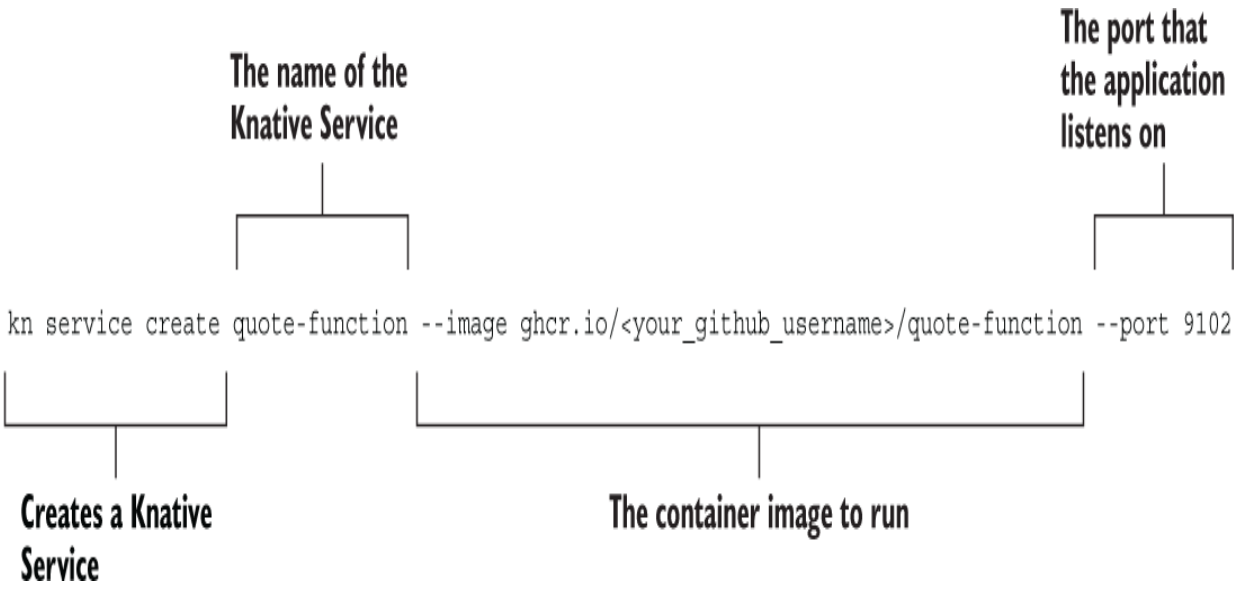


Figure 16.3 The Knative command for creating a Service from a container image. Knative will take care of creating all the resources necessary to deploy the applications on Kubernetes.

The command will initialize a new `quote-function` service in the `default` namespace on Kubernetes. It will return the public URL through which the application is exposed, in a message like the following:

```
Creating service 'quote-function' in namespace 'default':
```