NOTE This time, I've included the poor person's load generator, based on `curl`, in the Docker Compose file, so no further steps are required at this point.

Now, it's finally time to reap the fruits of our hard YAML wrangling, so open up your browser of choice and enter the two URLs for Prometheus (localhost:9090) and Jaeger (localhost:), and you should see something happening.

Switch to Prometheus and enter the PromQL query

```
sum by(http_status_code) (ho11y_total)
```

You should see (on the Graph tab) something like what is depicted in figure 4.8—that is, the sum of the overall sample app invocations (HTTP API calls), grouped by the HTTP status code returned (it's configured in a way to, on average, cause a 10% error rate).

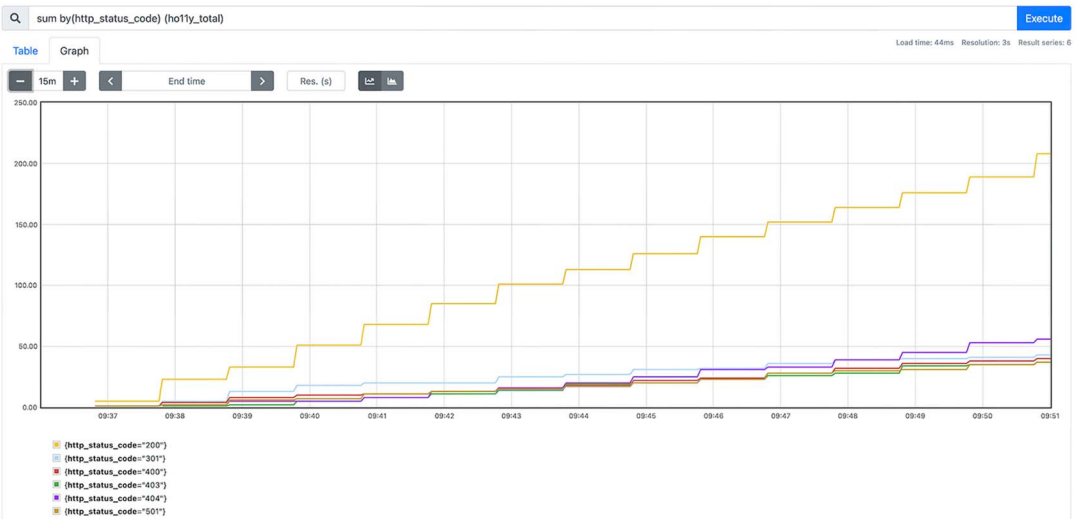


Figure 4.8 The Prometheus UI in action, showing a simple `ho11y` metric plotted over time

Moving on to traces: in Jaeger, you first have to select the service. You do this by choosing it from the respective dropdown box. Further, in the Tags field, you will enter

```
http.status_code=403
```

This means you're only interested in traces that carry this specific tag—in other words, traces that capture events where an HTTP status code 403 was returned by the `ho11y` sample app. Now, press the Find Traces button in the left-hand navigation, and the result should be akin to what is depicted in figure 4.9.