shopping basket. The right-hand side of the figure shows the admin-serving part, allowing shop admins to maintain the inventory and manage customers.

Let's drill down into one of the request paths in the end user–serving part of our e-commerce app (see figure 8.2). This describes the various components that process requests after a consumer clicks the Purchase button; also note that for the rest of this section, we will focus on the end user–serving part, not the admin part. So after a customer has put an item, say, a pair of binoculars, into the shopping basket, they want to check out to pay for the item and have it shipped.

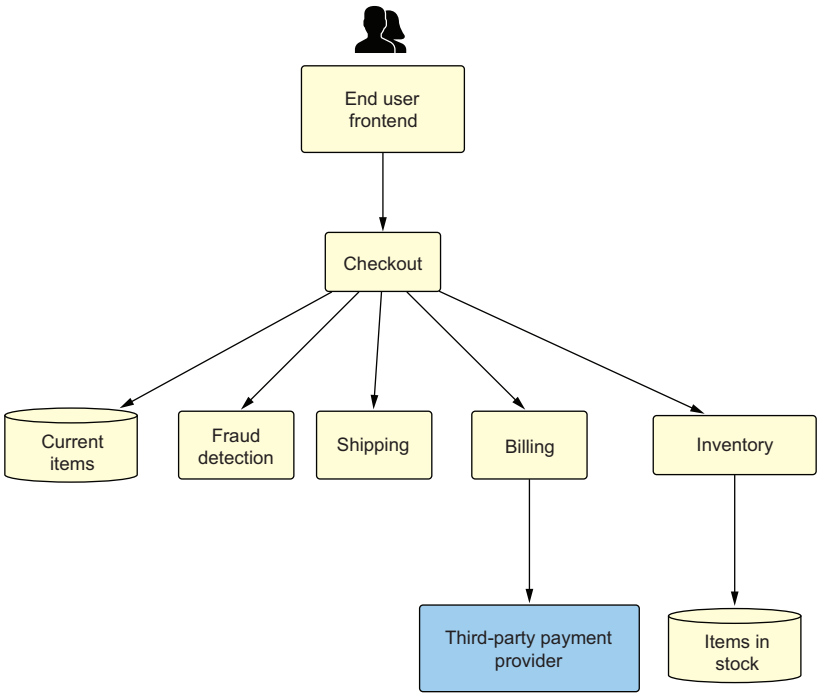


Figure 8.2 A single request path in the app

So what happens after the end user has entered all the necessary info, such as shipping address and payment details? As depicted in figure 8.2, the request path for this case looks as follows: the end user frontend calls the `checkout` service, which, in turn, has a couple of phases to complete, some of which may terminate the request (e.g., due to wrong user input or timeout of an external dependency):

- The `checkout` service queries the `current items` data store.
- A `fraud detection` service is invoked, checking if there are any reasons not to proceed.
- The shipping info from the `shipping` service is used to determine the shipping costs.