and ECS, as well as in FaaSs, such as AWS Lambda. We will show the example app running in Kubernetes.

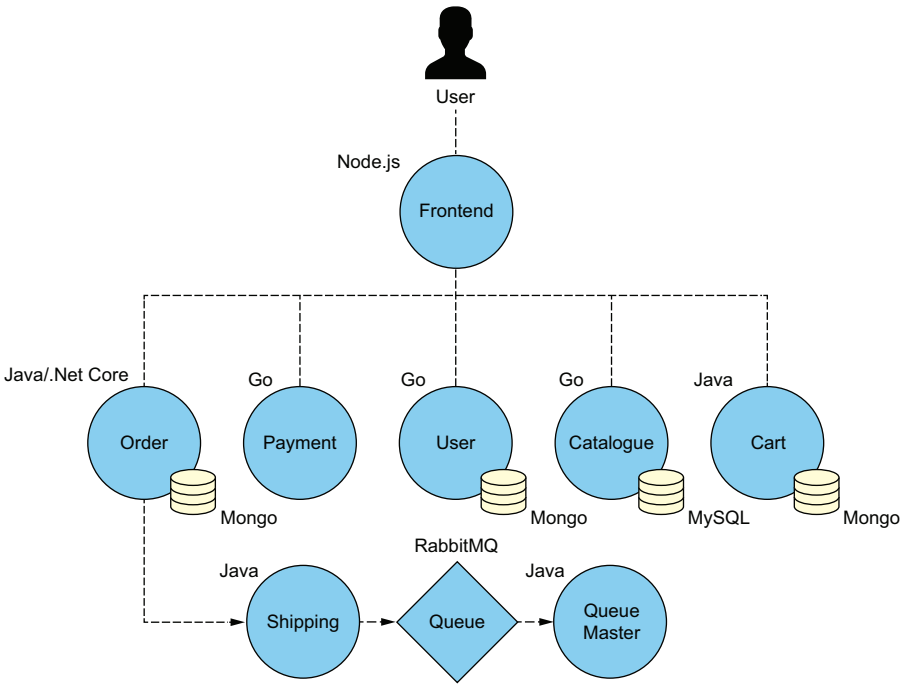


Figure 1.2 The example microservices app we use for observability exploration

> **TIP** Throughout the book, you will find me using a didactical device to explain concepts along the boundaries of logs, metrics, and traces. This is purely to structure the content and make it easier for you to learn and find information. The practical reality is much messier, since projects and products have the tendency to expand their scopes; therefore, a clear-cut explanation, such as "This thing is for logs" or "Use XYZ for metrics," is in most cases not applicable in the real world.

To set up the example microservices app, you need a Kubernetes cluster. Then, follow the steps in the following listing.

Listing 1.1 Local observability

Clones the example app repo and changes into the directory where the Kubernetes deployment YAML docs are located

```
$ git clone https://github.com/microservices-demo/microservices-demo.git &&
  \  cd microservices-demo/deploy/kubernetes/

$ kubectl create namespace sock-shop
```

Creates a Kubernetes namespace that acts as a logical home for our app