Now, you can head over to the Explore tab, which looks like a compass, in the left-hand menu. Select Loki as the data source (if it is not already set as the default), and under the Labels filter, select `service` as the label from the dropdown box and `echo` as the value. If you then select a certain time range, you should see something akin to what is shown in figure 2.2.

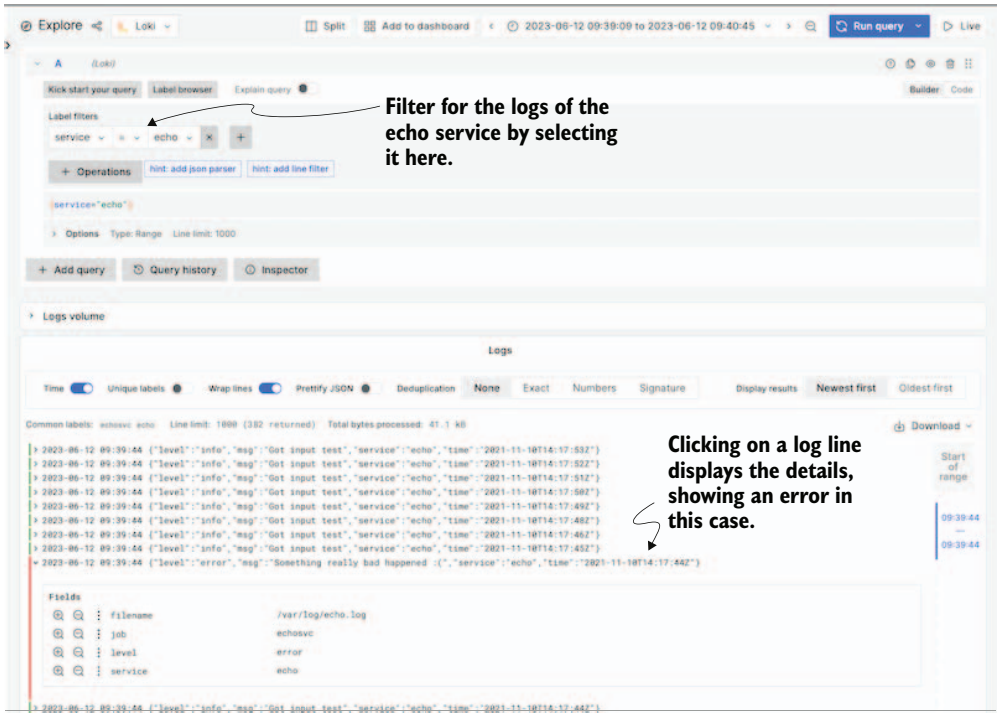


Figure 2.2 Exploring logs in Loki

The Loki data source explore view is quick and simple to filter for certain log levels. For example, you could add another label filter, such as `level="error"`, to only show error log lines.

> **TIP** To see what is running, use `docker-compose top` (in the directory that contains the docker-compose.yaml file) or `docker ps` (anywhere). Additionally, to tear down everything, removing all containers again, use the `docker-compose -f docker-compose.yaml down` command.

With this, we've completed our practical logs scenario. Now, we can move on to a discussion on the values logs bring to the table and what the costs (in terms of resources and efforts) concerning logs look like.