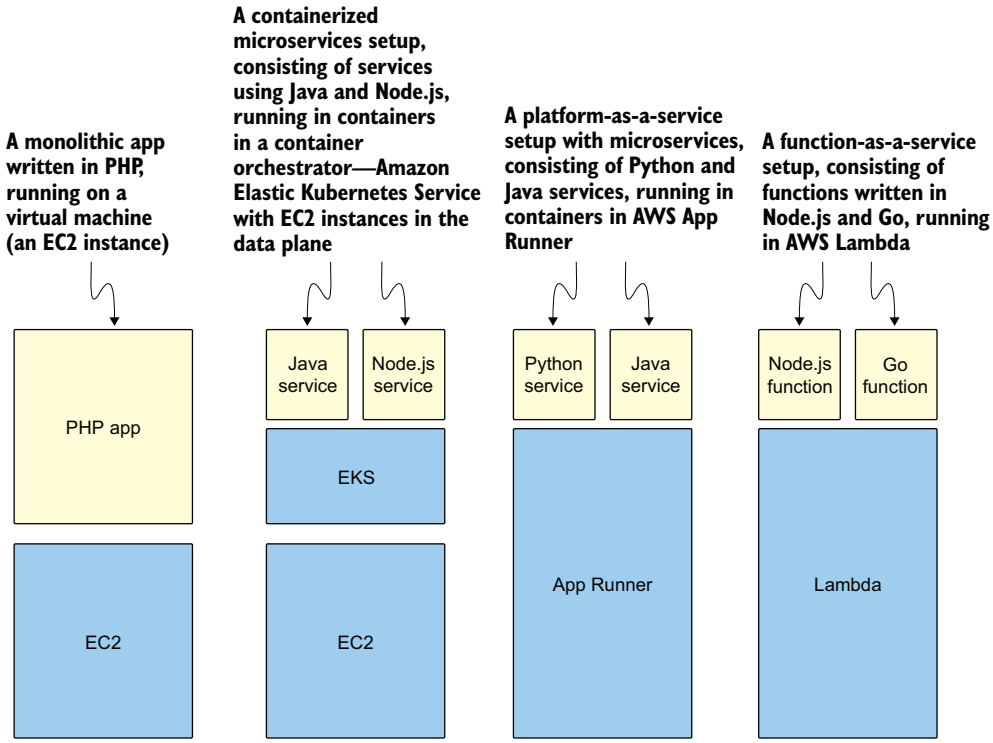


Figure 3.1 A spectrum of compute, infrastructure, and application level

always have to be prepared to deal with a variety of sources and what looks like a good tool or approach for, say, monitoring a monolith is likely not a good fit for a container.

Table 3.1 provides an overview of the coverage of signals across compute-related sources.

Table 3.1 Observability readiness for compute-related sources

Signal	Coverage	Example sources
Logs	All sources	EC2 instance, Docker daemon, and Lambda function
Metrics	Many sources	EC2 instance and Kubernetes metrics pipeline
Traces	Some sources	Node.js function in Lambda

Let's now have a closer look at concrete compute-related sources and their characteristics, in terms of signals. A VM is an established and widely used way to run arbitrary code with certain isolation guarantees with respect to other tenants on the underlying (physical) machine. There are also language-specific VMs, such as the