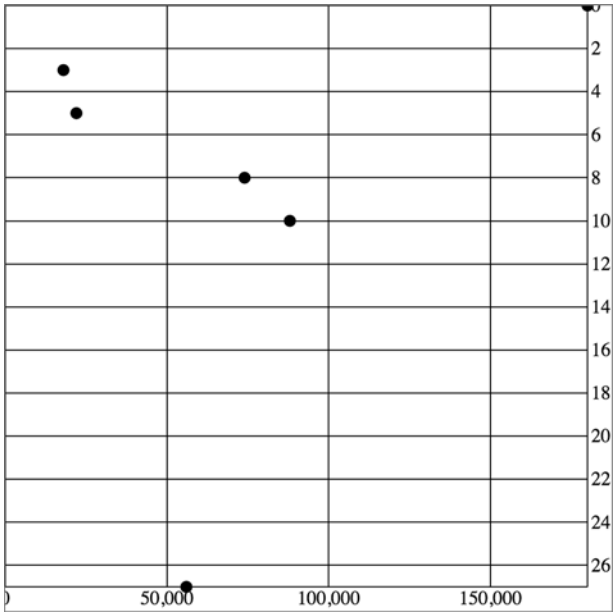


Figure 4.9 With `<path.domain>` fill set to `"none"` and CSS settings also corresponding to the tick `<line>` elements, we can draw a rather attractive grid based on our two axes.

With this in place, we get something a bit more legible, as shown in figure 4.9.

Take a look at the elements created by the `axis()` function in figure 4.9, and see in figure 4.10 how the CSS classes are associated with those elements.

As you create more-complex information visualization, you'll get used to creating your own elements with classes referenced by your style sheet. You'll also learn where

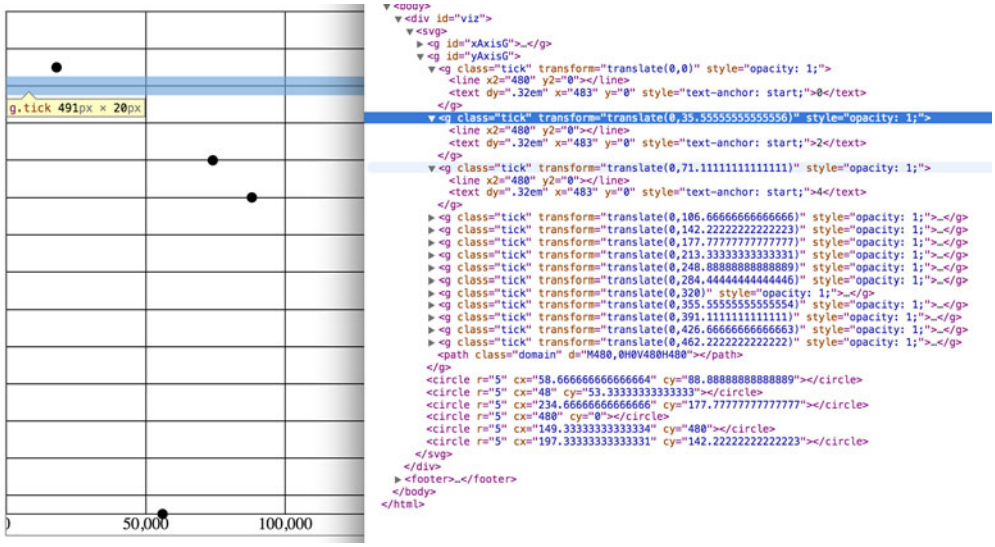


Figure 4.10 The DOM shows how tick `<line>` elements are appended along with a `<text>` element for the label to one of a set of `<g.tick.major>` elements corresponding to the number of ticks.