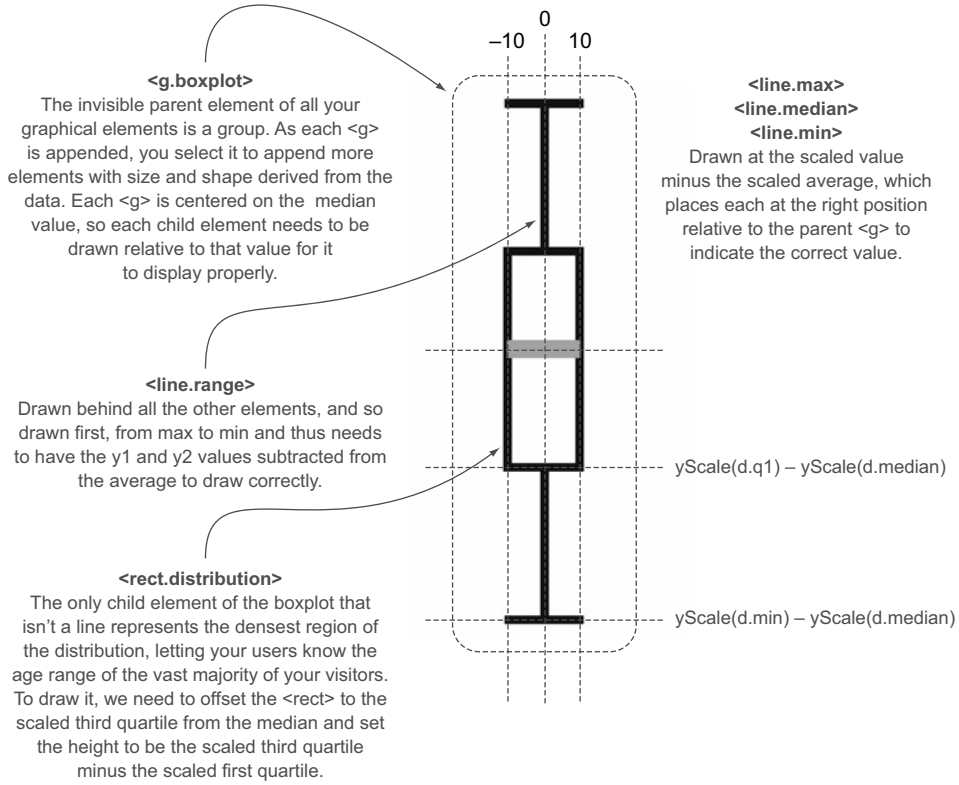


Figure 4.15 How a boxplot can be drawn in D3. Pay particular attention to the relative positioning necessary to draw child elements of a `<g>`. The 0 positions for all elements are where the parent `<g>` has been placed, so that `<line.max>`, `<rect.distribution>`, and `<line.range>` all need to be drawn with an offset placing their top-left corner above this center, whereas `<line.min>` is drawn below the center and `<line.median>` has a 0 y-value, because our center is the median value.

```
        .style("stroke", "black")
        .style("stroke-width", "4px");

    d3.select(this)
        .append("line")
        .attr("class", "max")
        .attr("x1", -10)
        .attr("x2", 10)
        .attr("y1", yScale(d.max) - yScale(d.median))
        .attr("y2", yScale(d.max) - yScale(d.median))
        .style("stroke", "black")
        .style("stroke-width", "4px");

    d3.select(this)
        .append("line")
        .attr("class", "min")
        .attr("x1", -10)
        .attr("x2", 10)
```

The top bar of the min-max line