```
    d3.select("svg").selectAll("circle.retweets")
          .data(data)
          .enter()
          .append("circle")
          .attr("class", "retweets")
          .attr("r", 5)
          .attr("cx", function(d) {return xScale(d.day)})
          .attr("cy", function(d) {return yScale(d.retweets)})
          .style("fill", "lightgray");

    d3.select("svg").selectAll("circle.favorites")
          .data(data)
          .enter()
          .append("circle")
          .attr("class", "favorites")
          .attr("r", 5)
          .attr("cx", function(d) {return xScale(d.day)})
          .attr("cy", function(d) {return yScale(d.favorites)})
          .style("fill", "gray");
};
```

The graphical results of this code, as shown in figure 4.17, which take advantage of the CSS rules we defined earlier, aren't easily interpreted.

4.4.1 Drawing a line from points

By drawing a line that intersects each point of the same category, we can compare the number of tweets, retweets, and favorites. We can start by drawing a line for tweets using `d3.svg.line()`. This line generator expects an array of points as data, and we'll need to tell the generator what values constitute the x and y coordinates for each

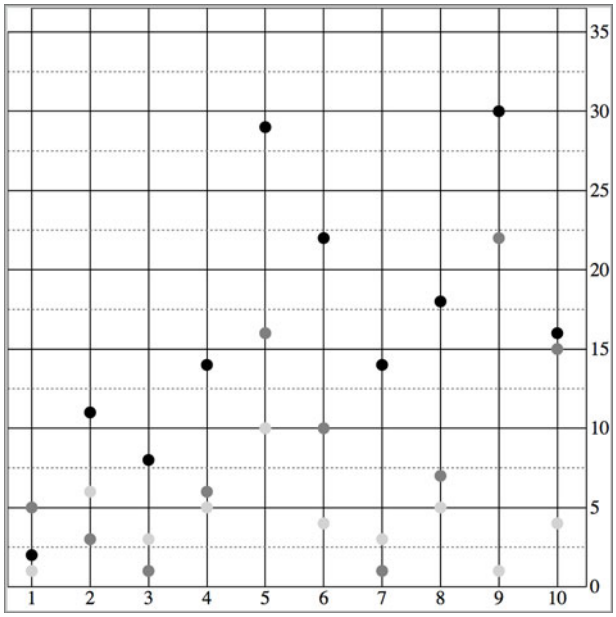


Figure 4.17 A scatterplot showing the datapoints for 10 days of activity on Twitter, with the number of tweets in light gray, the number of retweets in dark gray, and the number of favorites in black