Instantiates a line generator for each movie

```
var movieArea = d3.svg.line()
    .x(function(d) {
        return xScale(d.day);
    })
    .y(function(d) {
        return yScale(d[x]);
    })
    .interpolate("cardinal");

d3.select("svg")
    .append("path")
    .style("id", x + "Area")
    .attr("d", movieArea(data))
    .attr("fill", "none")
    .attr("stroke", "black")
    .attr("stroke-width", 3)
    .style("opacity", .75);

  };
};
```

Every line uses the day column for its x value.

Dynamically sets the y-accessor function of our line generator to grab the data from the appropriate movie for our y variable

The line-drawing code produces a cluttered line chart, as shown in figure 4.22. As you learned in chapter 1, lines and filled areas are almost exactly the same thing in SVG. You can differentiate them by a *Z* at the end of the drawing code that indicates the shape is closed, or the presence or absence of a `"fill"` style. D3 provides `d3.svg.line` and `d3.svg.area` generators to draw lines or areas. Both of these constructors produce `<path>` elements, but `d3.svg.area` provides helper functions to bound the lower end of your path to produce areas in charts. This means we need to define a `.y0()`

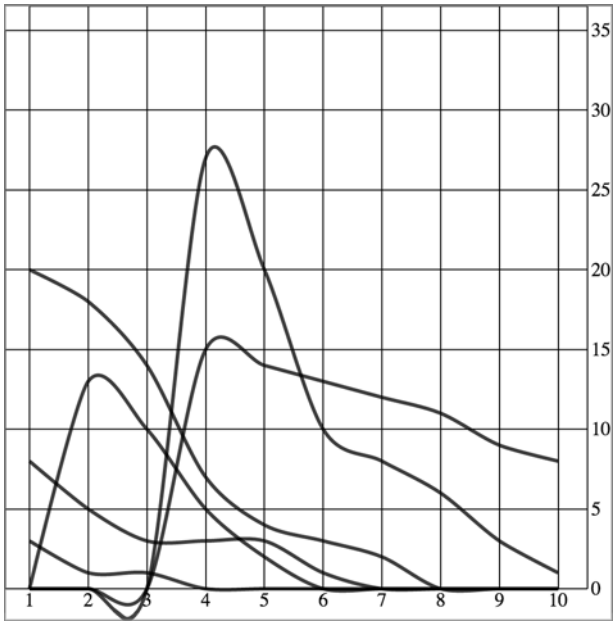


Figure 4.22 Each movie column is drawn as a separate line. Notice how the "cardinal" interpolation creates a graphical artifact, where it seems like some movies made negative money.