accessor that corresponds to our `y` accessor and determines the shape of the bottom of our area. Let's see how `d3.svg.area()` works.

Listing 4.13 Area accessors

```
for (x in data[0]) {
  if (x != "day") {

var movieArea = d3.svg.area()
    .x(function(d) {
       return xScale(d.day);
    })
    .y(function(d) {
       return yScale(d[x]);
    })
    .y0(function(d) {
       return yScale(-d[x]);
    })
    .interpolate("cardinal");

d3.select("svg")
    .append("path")
    .style("id", x + "Area")
    .attr("d", movieArea(data))
    .attr("fill", "darkgray")
    .attr("stroke", "lightgray")
    .attr("stroke-width", 2)
    .style("opacity", .5);

  };
};
```

This new accessor provides us with the ability to define where the bottom of the path is. In this case, we start by making the bottom equal to the inverse of the top, which mirrors the shape.

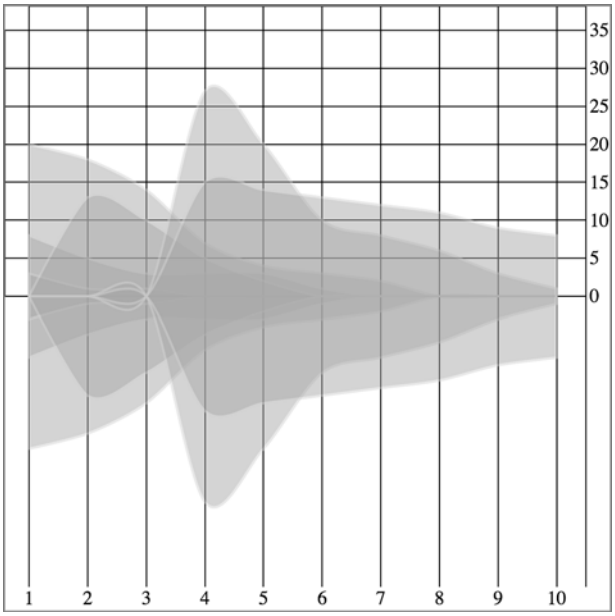


Figure 4.23 By using an area generator and defining the bottom of the area as the inverse of the top, we can mirror our lines to create an area chart. Here they're drawn with semitransparent fills, so that we can see how they overlap.