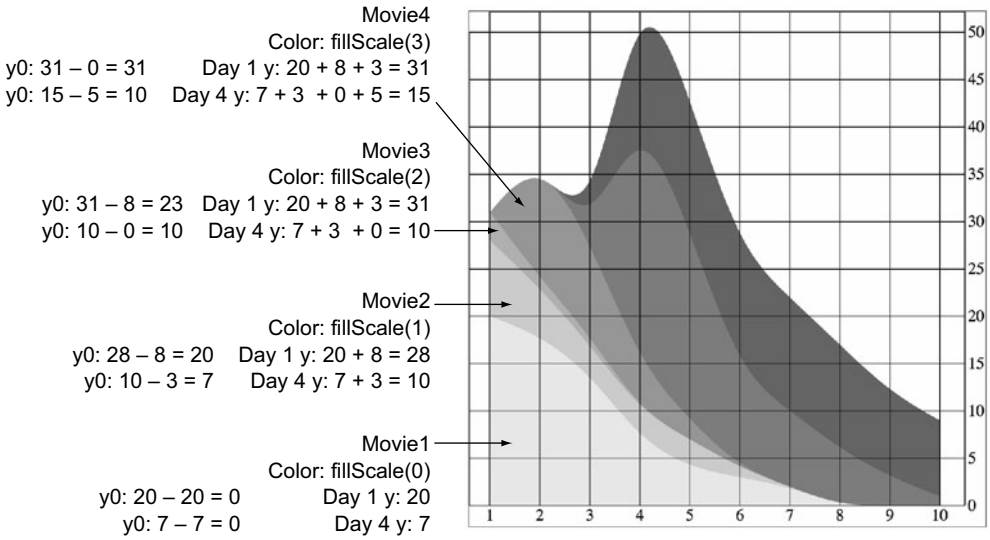


Figure 4.24 Our stacked area code represents a movie by drawing an area, where the bottom of that area equals the total amount of money made by any movies drawn earlier for that day.

The streamgraph in figure 4.25 has some obvious issues, but we're not going to correct them. For one thing, we're over-representing the gross of the first movie by drawing it at twice the height. If we wanted to, we could easily make the stacking function account for this by halving the values of that first area. Another issue is that the areas being drawn are different from the areas being displayed, which isn't a problem when our data visualization is going to be read from only one perspective and not multiple perspectives.

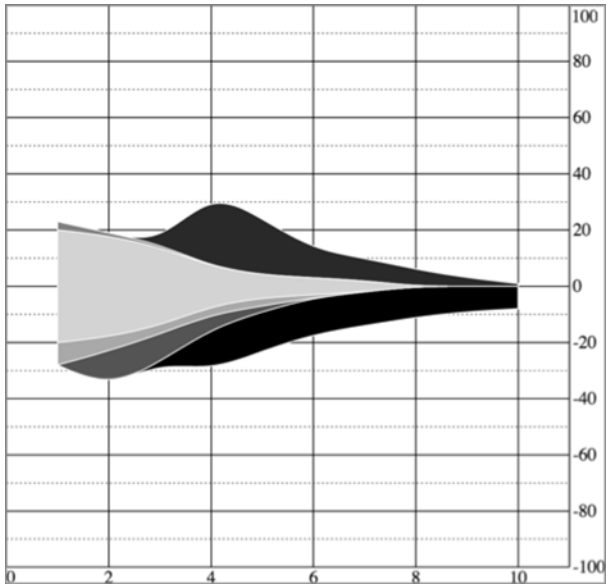


Figure 4.25 A streamgraph that shows the accreted values for movies by day. The problems of using different interpolation methods are clear. The basis method here shows some inaccuracies, and the difficulty of labeling the scale is also apparent.