```
        .attr("class", "bar")
        .each(function(d) {

            d3.select(this).selectAll("rect")
                .data(d.values)
                .enter()
                .append("rect")
                .attr("x", function(p) { return xScale(p.x) - 15; })
                .attr("y", function(p) { return yScale(p.y + p.y0); })
                .attr("height", function(p) { return heightScale(p.y); })
                .attr("width", 30)
                .style("fill", movieColors(d.name));
    });
```

In many ways, the stacked bar chart in figure 5.22 is much more readable than the streamgraph. It presents the same information, but the y-axis tells us exactly how much money a movie made. There's a reason why bar charts, line charts, and pie charts are the standard chart types found in your spreadsheet. Streamgraph, stacked bar charts, and stacked area charts are fundamentally the same thing, and rely on the stack layout to format your dataset to draw it. Because you can deploy them equally easily, your decision whether to use one or the other can be based on user testing rather than your ability to create awesome dataviz.

The layouts we've looked at so far, as well as the associated methods and generators, have broad applicability. Now we'll look at a pair of layouts that don't come with D3 that are designed for more specific kinds of data: the Sankey diagram and the word cloud. Even though these layouts aren't as generic as the layouts included in the core D3 library that we've looked at, they have some prominent examples and can come in handy.

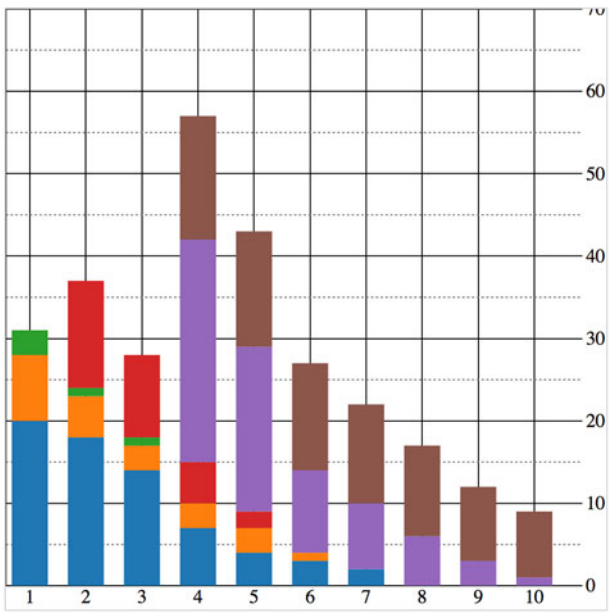


Figure 5.22 A stacked bar chart using the stack layout to determine the position of the rectangles that make up each day's stacked bar