FORCE.DRAG()

With traditional network analysis programs, the user can drag nodes to new positions. This is implemented using the behavior `force.drag()`. A behavior is like a component in that it's called by an element using `.call()`, but instead of creating SVG elements, it creates a set of event listeners.

In the case of `force.drag()`, those event listeners correspond to dragging events that give you the ability to click and drag your nodes around while the force layout runs. You can enable dragging on all your nodes by selecting them and calling `force.drag()` on that selection:

```
d3.selectAll("g.node").call(force.drag());
```

FIXED

When a force layout is associated with nodes, each node has a boolean attribute called `fixed` that determines whether the node is affected by the force during ticks. One effective interaction technique is to set a node as fixed when the user interacts with it. This allows users to drag nodes to a position on the canvas so they can visually sort the important nodes. To differentiate fixed nodes from unfixed nodes, we'll also have the function give fixed nodes a thicker `"stroke-width"`. The effect of dragging some of our nodes is shown in figure 6.17.

```
d3.selectAll("g.site").on("click", fixNode);

function fixNode(d) {
  d3.select(this).select("circle").style("stroke-width", 4);
  d.fixed = true;
};
```

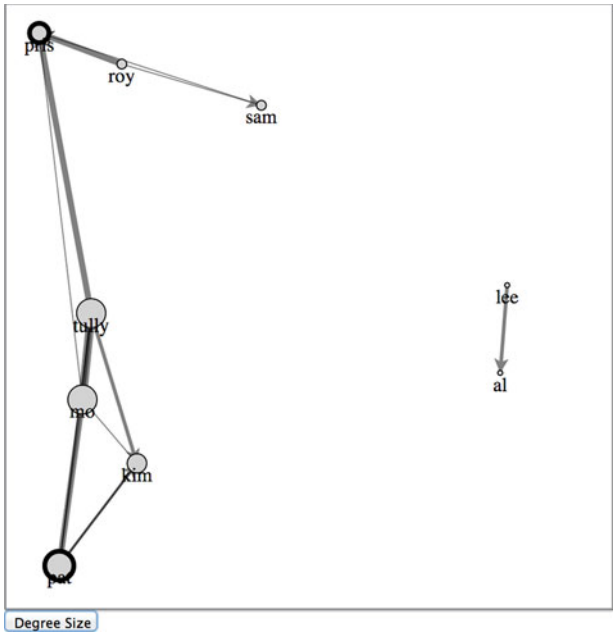


Figure 6.17 The node representing Pat has been dragged to the bottom-left corner and fixed in position, while the node representing Pris has been dragged to the top-left corner and fixed in position. The remaining unfixed nodes have taken their positions based on the force-directed layout.