```
    .enter()
    .insert("line", "g.node")
    .attr("class", "link")
    .style("stroke", "red")
    .style("stroke-width", 5)
    .attr("marker-end", "url(#Triangle)");

    force.start();
};
```

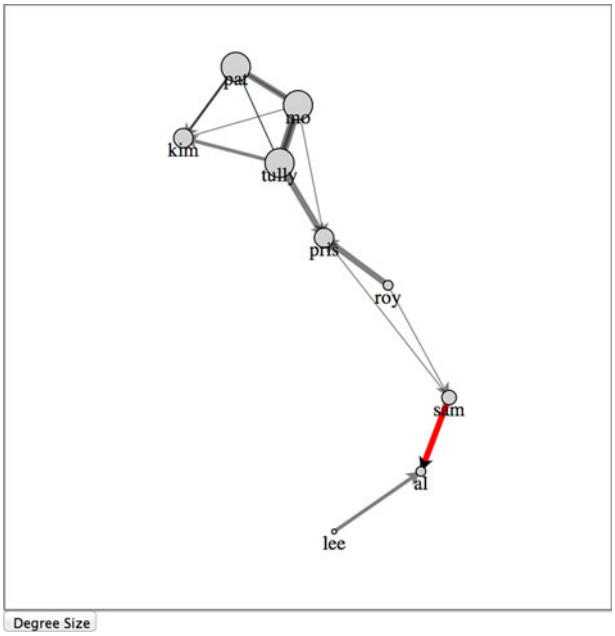


Figure 6.19 Network with a new edge added. Notice that because we re-initialized the force layout, it correctly recalculated the weight for Al.

If we want to add new nodes as shown in figure 6.20, we'll also want to add edges at the same time, not because we have to, but because otherwise they'll float around in space and won't be connected to our current network. The code and process, which you can see in the following listing, should look familiar to you by now.

Listing 6.11 Function for adding nodes and edges

```
function addNodesAndEdges() {
    force.stop();
    var oldEdges = force.links();
    var oldNodes = force.nodes();
    var newNode1 = {id: "raj", followers: 100, following: 67};
    var newNode2 = {id: "wu", followers: 50, following: 33};
    var newEdge1 = {source: oldNodes[0], target: newNode1, weight: 5};
    var newEdge2 = {source: oldNodes[0], target: newNode2, weight: 5};
    oldEdges.push(newEdge1,newEdge2);
    oldNodes.push(newNode1,newNode2);
    force.links(oldEdges).nodes(oldNodes);
```