This globe still has some issues. Because you don't update the `projection.center()`, and you base the rotation off the current position of the mouse, it resets any time you drag the globe. You also don't clip the cities when you first draw them. Further, you can make a D3 globe drag in any of the three directions you can rotate a normal globe. But if you're looking for that level of functionality, then you're better off exploring the many and robust examples available online (such as those of Jason Davies at http://jasondavies.com/maps/voronoi/capitals/). Instead, we'll look at another exotic way of representing geodata, the satellite projection.

7.3.2 Satellite projection

Isometric views of the world are powerful tools for storytelling. Imagine you had to create a map related to how the Middle East has a changing view of Europe. By crafting a satellite view looking out over the Mediterranean from the Middle East as shown in figure 7.15, you invite your map reader to see a distant Europe from a geographical perspective in the Middle East.

This is a projection just like the orthographic, Mercator, and Mollweide projections we previously used, but, as you see in the following listing, it has specific settings for scale and rotate. It also uses new settings, tilt and distance, to determine the angle of the satellite projection.

Listing 7.15 Satellite projection settings

```
projection = d3.geo.satellite()
    .scale(1330)
    .translate([250,250])
    .rotate([-30.24, -31, -56])
    .tilt(30)
    .distance(1.199)
    .clipAngle(45);
```

The angle of the perspective on the geographic features

The distance of the surface from your perspective

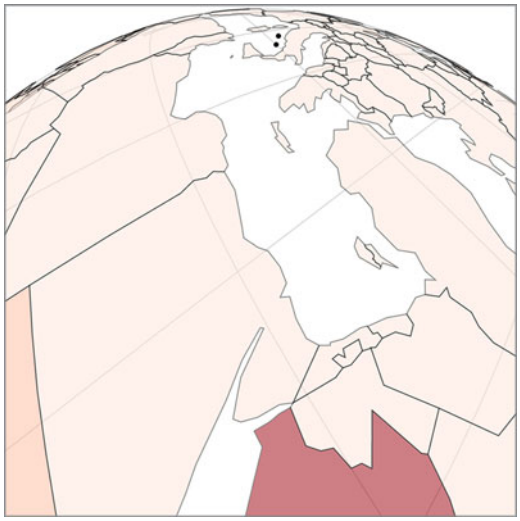


Figure 7.15 A satellite projection of data from the Middle East facing Europe