```
        .style("stroke-width", "2px")
        .attr("d", geoPath);
    };
};
```

We can adjust the `mergeAt` test slightly to look at the x coordinate or to see features that have greater values of `mergeAt`. As shown in figure 7.18, this creates a single feature in each of four cases: less than or greater than 0° latitude and less than or greater than 0° longitude. Notice in each case that it's a single feature but not a single polygon.

A quick note for those who may want to continue working in topologies: `Topojson.merge` has a sister function, `mergeArcs`, that allows you to merge shapes but keep them in TopoJSON format. Why would you want to maintain arcs? Because then you could continue to use TopoJSON functionality like merging, creating meshes, or finding neighbors of your newly merged features.

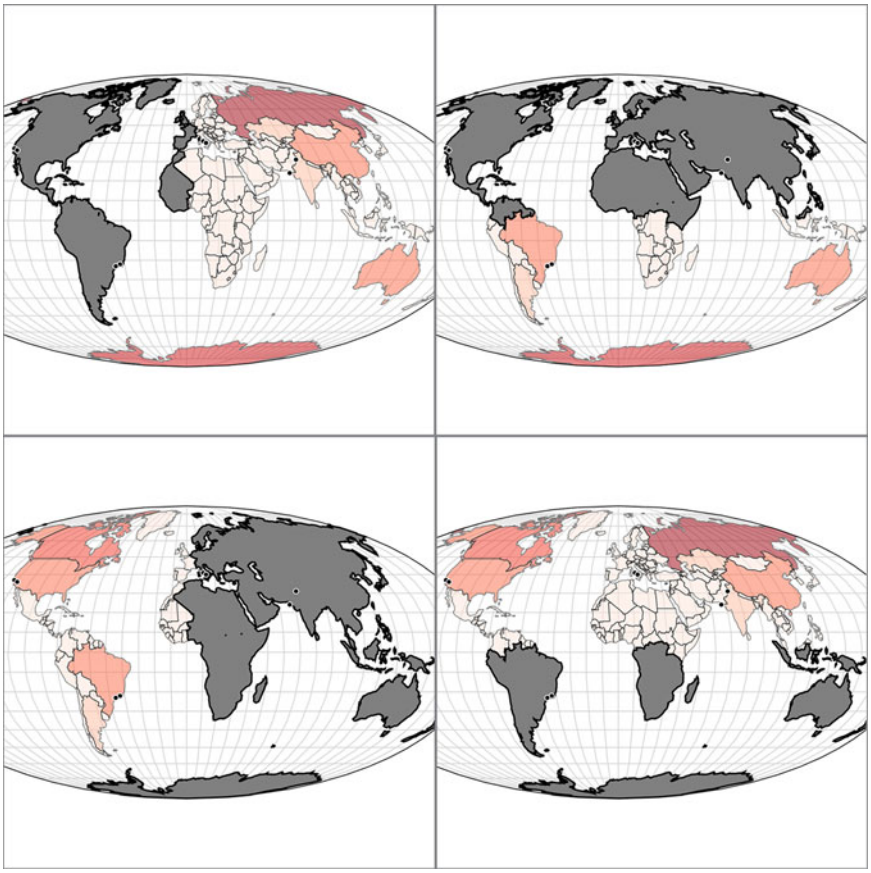


Figure 7.18 By adjusting the merge settings, we can create something like northern, southern, eastern, and western hemispheres as merged features. Notice that because this is based on a centroid, we can see at the bottom left a piece of Eastern Russia as part of our merged feature, along with Antarctica.