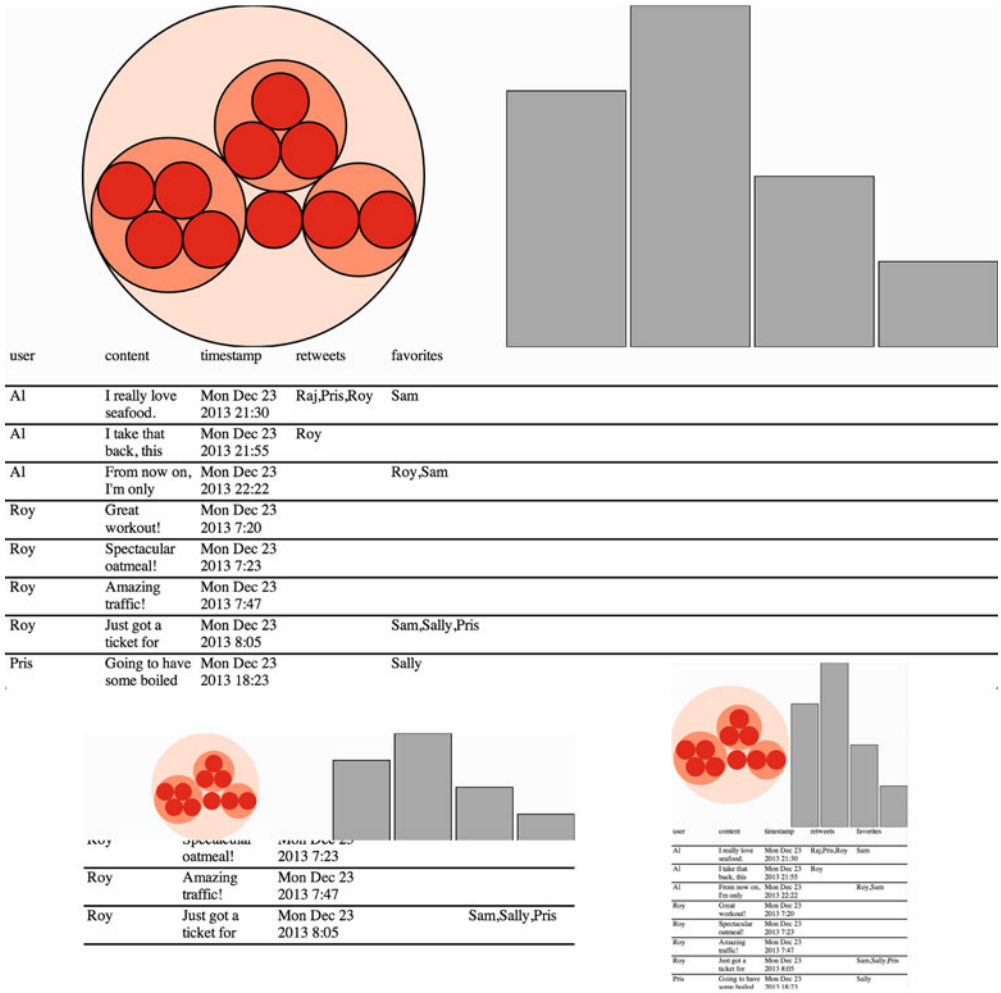


user	content	timestamp	retweets	favorites
Al	I really love seafood.	Mon Dec 23 2013 21:30	Raj,Pris,Roy	Sam
Al	I take that back, this	Mon Dec 23 2013 21:55	Roy	
Al	From now on, I'm only	Mon Dec 23 2013 22:22		Roy,Sam
Roy	Great workout!	Mon Dec 23 2013 7:20		
Roy	Spectacular oatmeal!	Mon Dec 23 2013 7:23		
Roy	Amazing traffic!	Mon Dec 23 2013 7:47		
Roy	Just got a ticket for	Mon Dec 23 2013 8:05		Sam,Sally,Pris
Pris	Going to have some boiled	Mon Dec 23 2013 18:23		Sally

Figure 9.4 The charts automatically resize when the screen is resized. The bar chart is stretched to fit, while the circle pack chart is recalculated to fit the space as best as possible.

9.2 Interactivity: hover events

First, we'll highlight a row on the spreadsheet when hovering over the corresponding circles in the circle pack. You do this by checking the circle elements to see if the bound data is the same as the data bound to the spreadsheet elements. If you're using the same data to create multiple charts, as we do in this example, then this is the most straightforward method to use. But if you're loading data from multiple sources, but that data refers to the same things, then you'll need to use a unique ID for this test, such as an employee identification number or a user ID. Because both the divs and the circles hold the same data, binding the same event listener to each, as in listing 9.9, results in cross-highlighting, as shown in figure 9.5.