
```
function mouseOut() {
    d3.selectAll("circle.pack")
              .style("fill", function(d) {
                        return depthScale(d.depth);
              });
    d3.selectAll("div.datarow").style("background", "white");
};
```

Restores fill and background color on mouseout

Now we'll tie the bar chart in. Recall that because of our nesting function, each bar in the bar chart corresponds to one of the level 1 hierarchical circles. Therefore, we can update our hover behavior to do the same thing we did with the spreadsheet rows and check to see if one bound datapoint is the same as the other, with the results seen in figure 9.6.

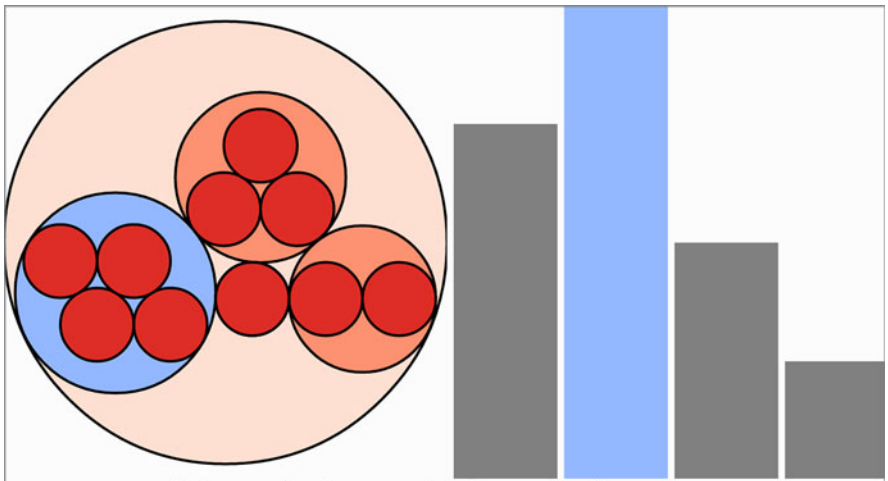

user	content	timestamp	retweets	favorites
Al	I really love seafood.	Mon Dec 23 2013 21:30	Raj,Pris,Roy	Sam
Al	I take that back, this	Mon Dec 23 2013 21:55	Roy	
Al	From now on, I'm only	Mon Dec 23 2013 22:22		Roy,Sam
Roy	Great workout!	Mon Dec 23 2013 7:20		
Roy	Spectacular oatmeal!	Mon Dec 23 2013 7:23		
Roy	Amazing traffic!	Mon Dec 23 2013 7:47		
Roy	Just got a ticket for	Mon Dec 23 2013 8:05		Sam,Sally,Pris
Pris	Going to have some boiled	Mon Dec 23 2013 18:23		Sally

Figure 9.6 The same code that checks to see if the datapoints are the same in the circle pack chart as in the spreadsheet can be used to identify nested data parents, as long as the data comes from the same `d3.nest` operation.