

Figure 9.9 The results of our `brushed()` function showing level 2 circle visibility and bar chart changes based on the changing extent of our brush

9.3.2 Making our brush more user friendly

The addition of an axis makes a brush more comprehensible to a user than a blank space that happens to show a different cursor on mouseover. But brushing isn't a common user activity, and you should do a couple things to make brushes more user friendly. One common thing is to add a set of handles on each end of the brush to signify that the brush is resizable from those ends. The areas that allow for resizing (and that trigger the `ew-resize` cursor) are on both ends of the brush. They can be seen by selecting the SVG rect elements in use by the brush and changing their visibility style as well as their fill:

```
d3.selectAll("g.resize > rect").style("visibility", "visible").style("fill",
"red")
```

The result, shown in figure 9.10, is that our invisible resizing regions are now visible and distinct from the rest of the brush. This may be fine, but typically, handles are, if you'll pardon the pun, handled differently.

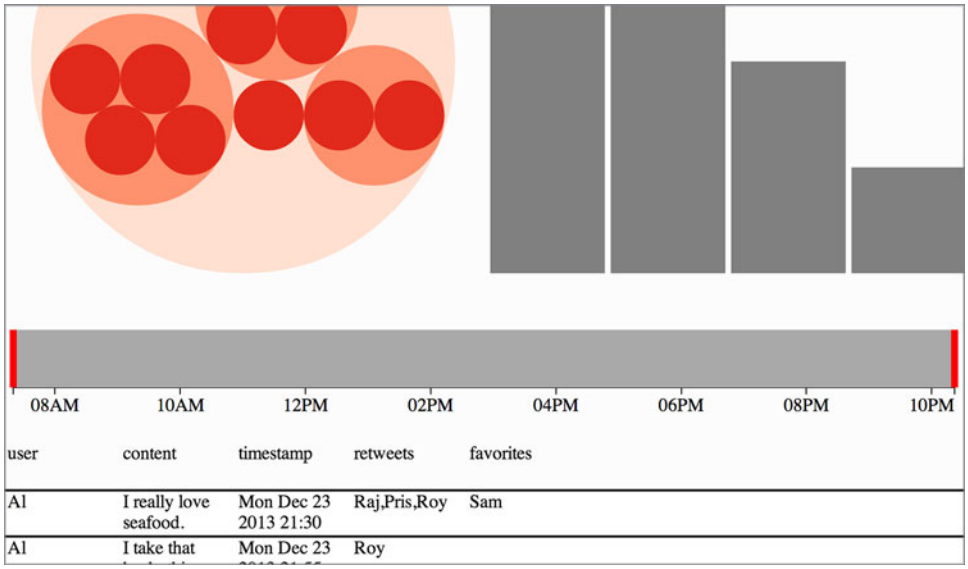


Figure 9.10 The `rect` elements in the resizing areas on each end of the brush are now visible and filled red.