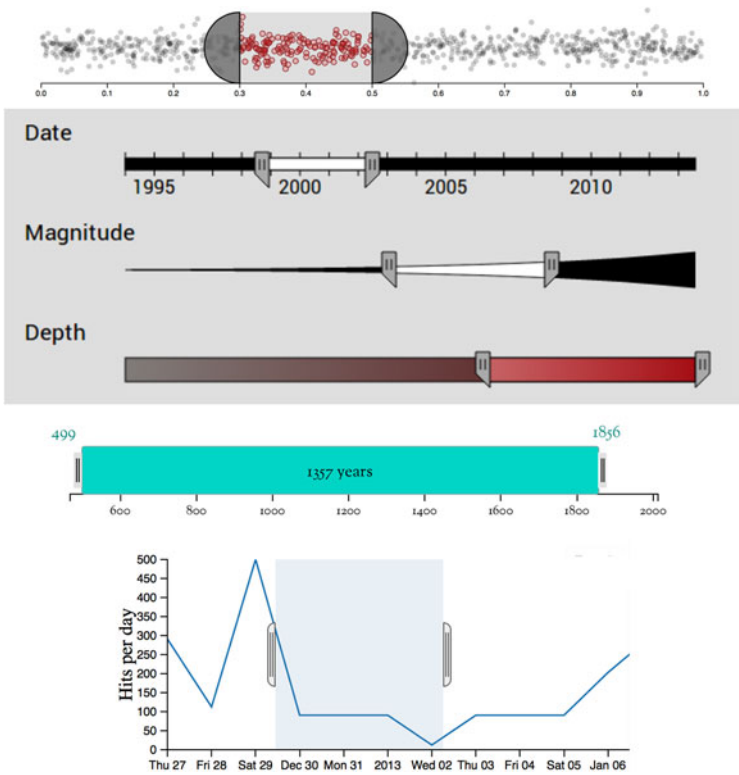


Figure 9.11 Brush handles on a variety of brushes, such as (from top) an example by Mike Bostock, a CS project exploring earthquake frequency, the Kindred Britain search brush, and dc.js.[1]

D3.js examples use a variety of brush handles, from semicircles to beveled rectangles, as shown in figure 9.11. But you can do more than give a brush handles; for example, you can provide feedback about whether there's any data that overlaps with the brushed region. You'll see that as soon as you make handles for your brush.

Our handles won't be quite as exciting as these. Instead, we'll add semitransparent circles on each end, which results in a brush with handles like that shown in figure 9.12:

```
d3.selectAll("g.resize").append("circle")
    .attr("r", 25)
    .attr("cy",25)
    .style("fill", "white")
    .style("stroke", "black")
    .style("stroke-width", "4px")
    .style("opacity", .75);
```

[1] See these examples at the following URLs: Brush Handles by Mike Bostock (http://bl.ocks.org/mbostock/4349545); earthquake visualization by Andrew Lee (http://vis.berkeley.edu/courses/cs294-10-fa13/wiki/index.php/A3-AndrewLee); Kindred Britain search brush (http://kindred.stanford.edu); dc.js (http://dc-js.github.io/dc.js/).