```
      .style("stroke", "black")
      .style("stroke-width", "1px");
  };
```

We'll focus on only one attribute of our data: the size of each country. We'll color the circles according to that size using a quantize scale that puts each country into one of several discrete categories. In our case, we'll use the `colorbrewer.Reds[7]` array of light-to-dark reds as our bins. The quantize scale will split the countries into seven different groups. In the following listing you can see how to set that up, and figure 10.7 shows the result of our new color scale.

**Listing 10.11 Changing the color of our grid**

```
var griddedData = d3.selectAll("circle").data();
var sizeExtent = d3.extent(griddedData, function (d) {return d.size;});
var countryColor = d3.scale.quantize()
              .domain(sizeExtent).range(colorbrewer.Reds[7]);
d3.selectAll("circle").style("fill", function (d) {
              return countryColor(d.size);});
```

**Gets the data array bound to our circles**

For a more complete data visualization, we'd want to add labels for the countries or other elements to identify the continent or region of the country. But we'll focus on explaining what the color indicates. We don't want to get bogged down with other details from the data that could be explained, for example, using modal windows, as we did for our World Cup example in chapter 4, or using other labeling methods discussed throughout this book. For our legend to be useful, it needs to account for the different categories of coloration and indicate which color is associated with which band of values. But before we get to that, let's build a component that creates graphical elements when we call it. Remember that the `d3.select("#something").call(someFunction)` function of a selection is the equivalent of `someFunction(d3.select("#something"))`. With that in mind, we'll create a function that expects a selection and operates on it.

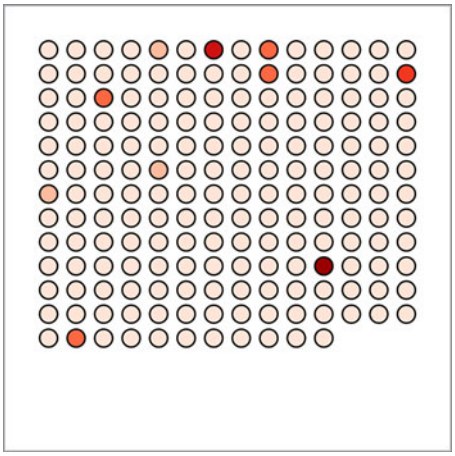


**Figure 10.7 Circles representing countries colored by area**