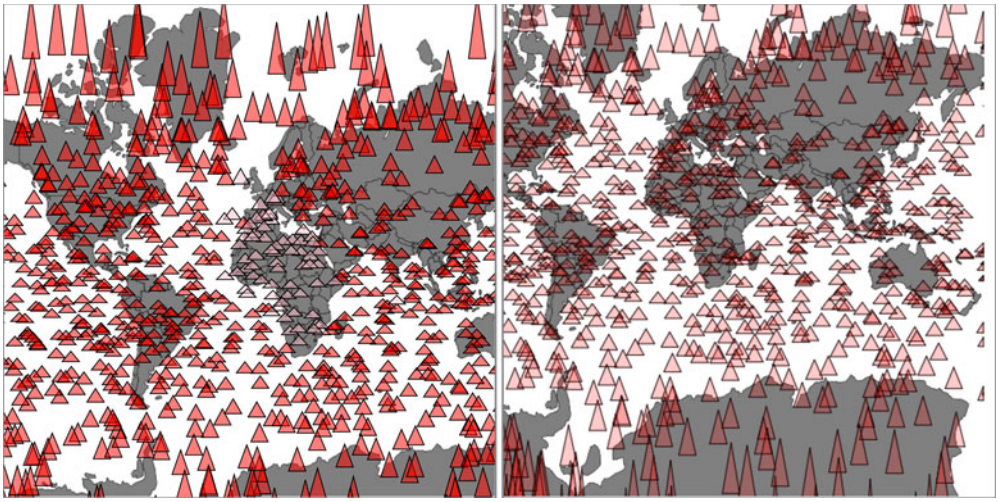


Figure 11.6 The same randomly generated triangles rendered in SVG while the map isn't being zoomed or panned (left) and in canvas while the map is being zoomed or panned (right). Notice that only the SVG triangles have different fill values based on user interaction, because that isn't factored into the canvas drawing code for the triangles on the right.

appear above *some* of our SVG elements visually but below other SVG elements, and we want interactivity on all them. In that case we'd need to sandwich our canvas layer between our SVG layers and set the `pointer-events` style of our canvas layer, as shown in figure 11.7.

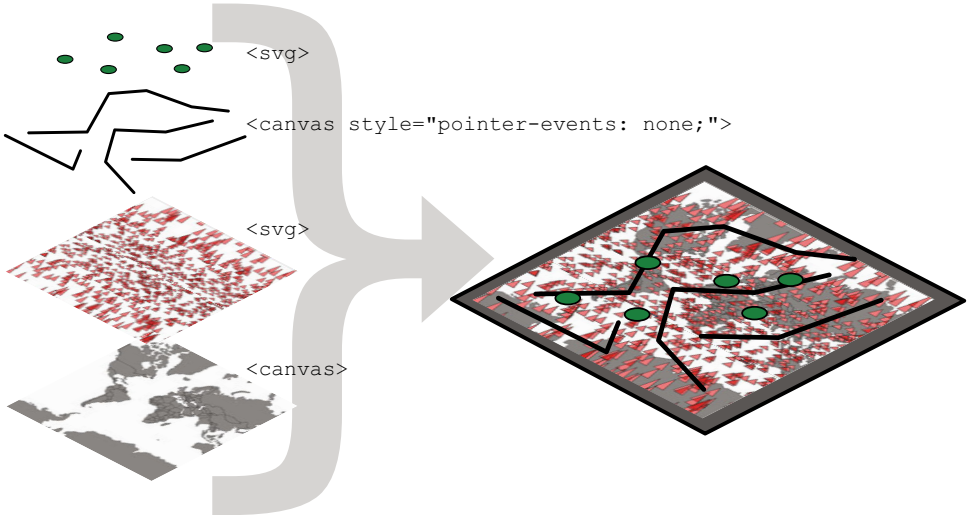


Figure 11.7 Placing interactive SVG elements below a `<canvas>` element requires that you set its `pointer-events` style to `"none"`, even if it has a transparent background, in order to register click events on the `<svg>` element underneath it.