```
}
</style>
<body>
  <div id="infovizDiv">
  <svg style="width:500px;height:500px;border:1px lightgray solid;">
    <path d="M 10,60 40,30 50,50 60,30 70,80" />
    <polygon class="inactive" points="80,400 120,400 160,440 120,480 60,460" />
  <g>
  <circle class="active tentative" cy="100" cx="200" r="30"/>
  <rect class="active" x="410" y="200" width="100" height="50" />
  </g>
  </svg>
  </div>
</body>
</html>
```

The results stack on each other, so when you examine the rectangle element, as shown in figure 1.22, you see that its style is set by the reference to `rect` in the style sheet as well as the class attribute of `active`.

Style sheets can also refer to a state of the element, so with `:hover` you can change the way an element looks when the user mouses over that element. You can learn

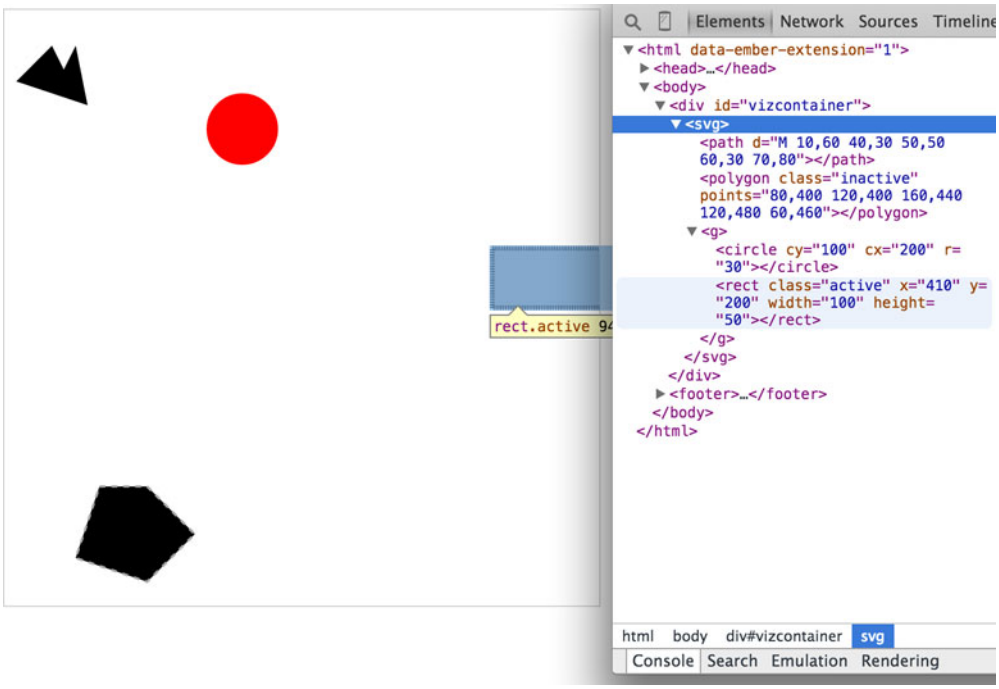


Figure 1.22 Examining an SVG rectangle in the console shows that it inherits its fill style from the CSS style applied to `<rect>` types and its stroke style from the `.active` class.