```
.append("span")
.html("Even More Wow")
.style("font-weight", "900");
```

The result, as shown in figure 1.25, is the addition of three lines of text. It might surprise you that this code is three lines, given that the array has four values. Although the data was bound to the existing `<div>` element on the page, the actions that changed the contents were only applied to the `.enter()` function. They were only applied to the newly created `<div>` elements that were "entering" the DOM for the first time.

When you inspect the DOM, as shown in figure 1.26, you see that the method chaining operated in the manner just described. A `<div>` was added, and its HTML

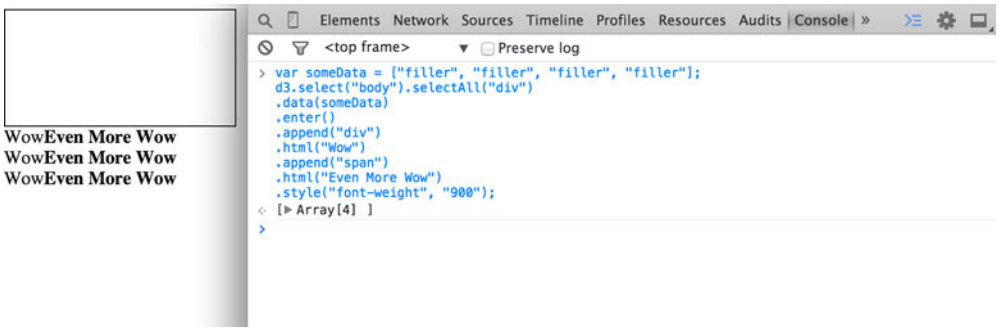



**Figure 1.25 By binding an array of four values to a selection of `<div>` elements on the page, the `.enter()` function created three new `<div>` elements to reflect the size mismatch between the data array and the selection.**

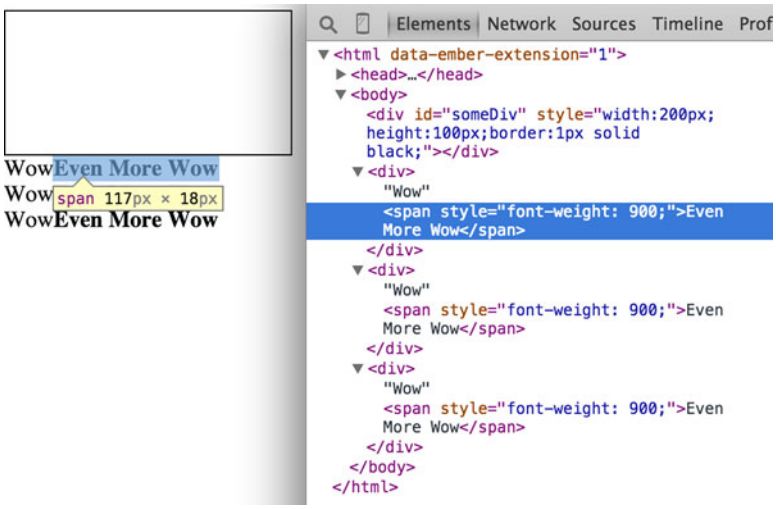



**Figure 1.26 Inspecting the DOM shows that the new `<div>` elements have been created with unformatted content followed by the child `<span>` element with style and content set by your code.**