have a spreadsheet of user information that includes age and salary. If you export it in a delimited form, it will look like table 1.1.

Table 1.1 Delimited data can be expressed in different forms. Here a dataset stores name, age, and salary of two people using commas, spaces, or the bar symbol to delimit the different fields.

name,age,salary	name age salary	name|age|salary
Sal,34,50000	Sal 34 50000	Sal|34|50000
Nan,22,75000	Nan 22 75000	Nan|22|75000

D3 provides three different functions to pull in tabular data: `d3.csv()`, `d3.tsv()`, and `d3.dsv()`. The only difference between them is that `d3.csv()` is built for comma-delimited files, `d3.tsv()` is built for tab-delimited files, and `d3.dsv()` allows you to declare the delimiter. You'll see them in action throughout the book.

1.4.2 Nested data

Data that is nested, with objects existing as children of objects recursively, is very common. Many of the most intuitive layouts in D3 are based on nested data, which can be represented as trees, such as the one in figure 1.28, or packed in circles or boxes. Data isn't often output in such a format, and requires a bit of scripting to organize it as

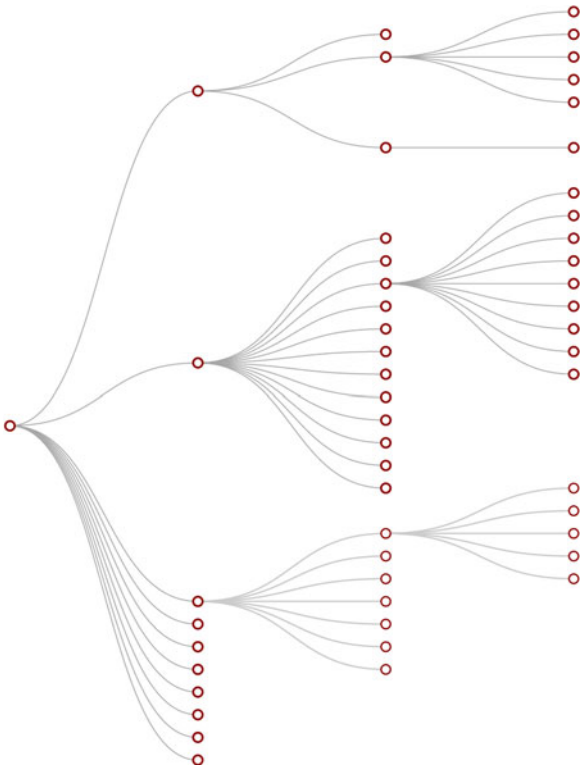


Figure 1.28 Nested data represents parent/child relationships of objects, typically with each object having an array of child objects, and is represented in a number of forms, such as this dendrogram. Notice that each object can have only one parent.