```
  .style("font-size", "24px")
  .attr("id", "newDiv")
  .attr("class", "d3div")
  .on("click", function() {console.log("You clicked a div")});
```

The `.on()` function allows us to create an event listener for the currently selected element or set of elements. It accepts the variety of events that can happen to an element, such as click, mouseover, mouseout, and so on. If you click your div, you'll notice that it gives a response in your console, as shown in figure 1.31.

1.6.2 Hello World with circles

You didn't pick up this book to learn how to add divs to a web page, but you likely want to deal with graphics like lines and circles. To append shapes to a page with D3, you need to have an SVG canvas element somewhere in your page's DOM. You could either add this SVG canvas to the page as you write the HTML, or you could append it using the D3 syntax you've learned:

```
d3.select("body").append("svg");
```

Let's adjust our d3ia.html page to start with an SVG canvas.

Listing 1.9 A simple web page with an SVG canvas

```
<!doctype html>
<html>
<head>
   <script src="d3.v3.min.js" type="text/JavaScript"></script>
</head>
<body>
   <div id="vizcontainer">
   <svg style="width:500px;height:500px;border:1px lightgray solid;" />
   </div>
</body>
</html>
```

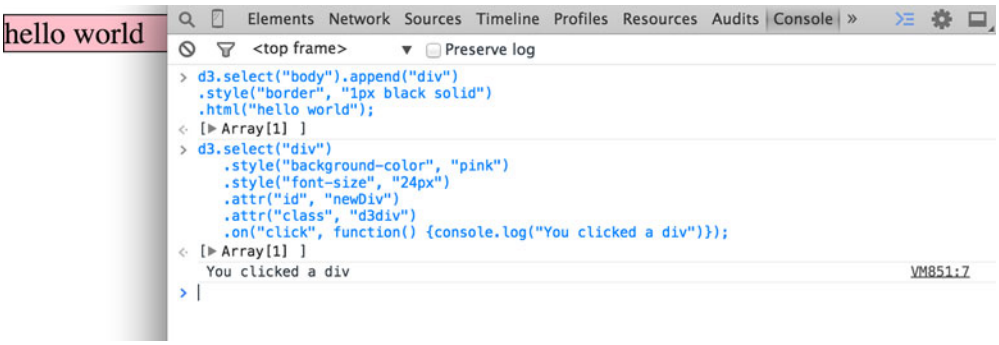


Figure 1.31 Using `console.log()`, you can test to see if an event is properly firing. Here you create a `<div>` and assign an onclick event handler using the `.on()` syntax. When you click that element and fire the event, the action is noted in the console.