you'll see later in this chapter and throughout the book, this is the basic process for using scales in D3.

2.3 Data presentation style, attributes, and content

Next, we'll work with the cities and tweets data to create a second bar chart combining the techniques you've learned in this chapter and chapter 1. After that, we'll deal with the more complicated methods necessary to represent the tweets data in a simple data visualization. Along the way, you'll learn how to set styles and attributes based on the data bound to the elements, and explore how D3 creates, removes, and changes elements based on changes in the data.

2.3.1 Visualization from loaded data

A bar chart based on the cities.csv data is straightforward, requiring only a scale based on the maximum population value, which we can determine using `d3.max()`, as shown in the following listing. This bar chart (shown annotated in figure 2.21) shows you the distribution of population sizes of the cities in our dataset.

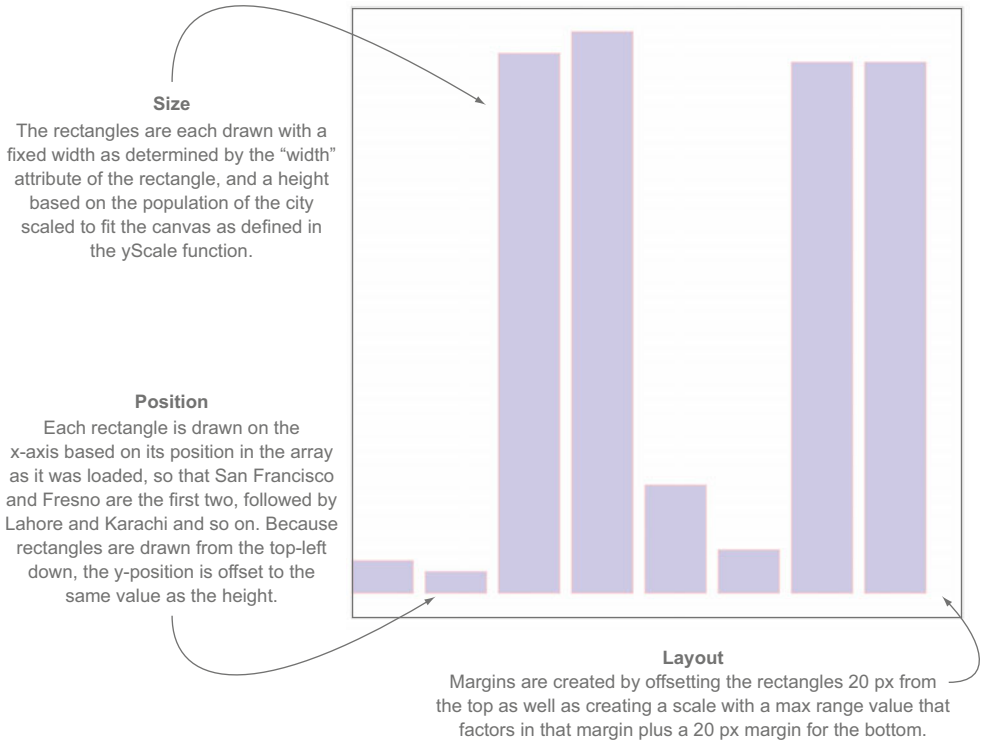


Figure 2.21 The cities.csv data drawn as a bar chart using the maximum value of the population attribute in the domain setting of the scale