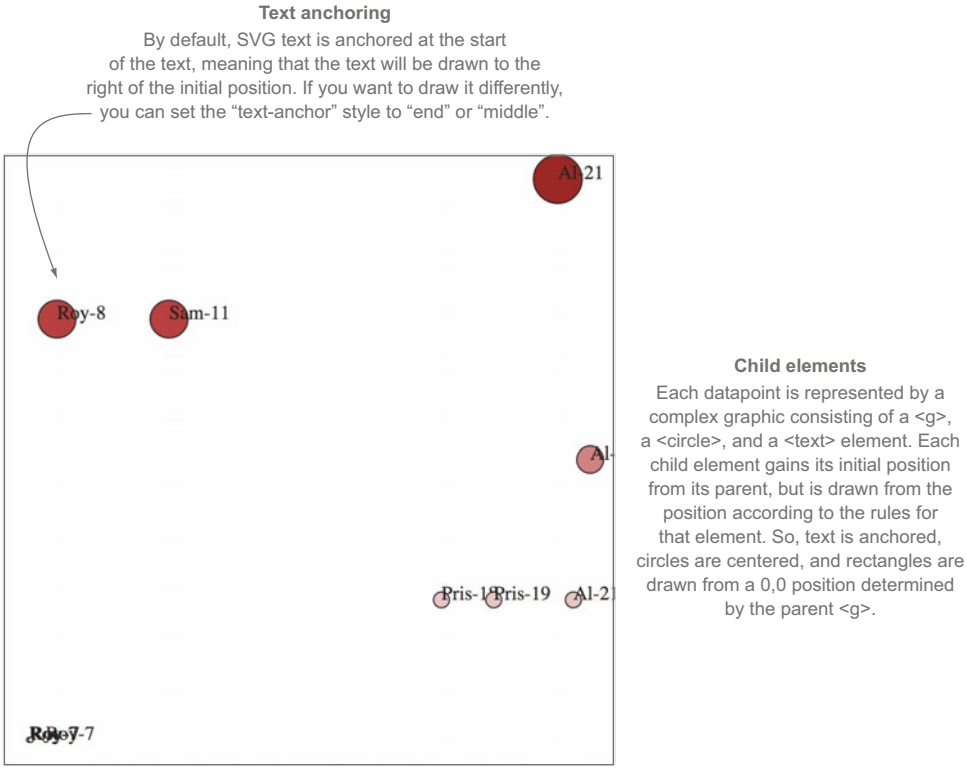


Figure 2.25 Each tweet is a `<g>` element with a circle and a label appended to it. The various tweets by Roy at 7 A.M. happen so close to each other that they're difficult to label.

to be the name of the person making the tweet, followed by a dash, followed by the hour of the tweet. These functions all refer to the same data elements, because the child elements inherit their parents' data functions. If one of your data elements is an array, you may think you could bind it to a selection on the child element, and you'd be right. You'll see that in the next chapter and later in the book.

EXIT

Corresponding to the `.append()` function is the `.remove()` function available with `.exit()`. To see `.exit()` in action, you need to have some elements in the DOM, which could already exist, depending on what you put in your HTML, or which could have been added with D3. Let's stick with the state that the previous code creates, which provides us with ample opportunity to test the `.exit()` function. DOM element styles and attributes aren't updated if we make a change to the array unless we call the necessary `.style()` and `.attr()` functions. If we bind any array to the existing `<g>` elements in your DOM, then we can use `.exit()` to remove them:

```
d3.selectAll("g").data([1,2,3,4]).exit().remove();
```