Now, when we call `generate_table()`, the DLT pipeline will automatically clean up our table by dropping any null `CustomerID` values and flagging records without a `Product` value. Moreover, DLT will automatically build helpful visualizations to immediately investigate the data's quality.

To try this yourself, update the DLT code from *Chapter 3* (here's the path to the notebook as a reminder: `Chapter 3: Building Out Our Bronze Layer/Project: Streaming Transactions/delta_live_tables/`) to match *Figure 4.1*, and then rerun the DLT pipeline as you did before. Once the pipeline is complete, it generates the DAG. Click on the `synthetic_transactions_silver` table, then click the **Data Quality** tab from the table details. This will display information about the records processed, such as how many were written versus dropped for failing a given expectation, as shown in *Figure 4.2*.

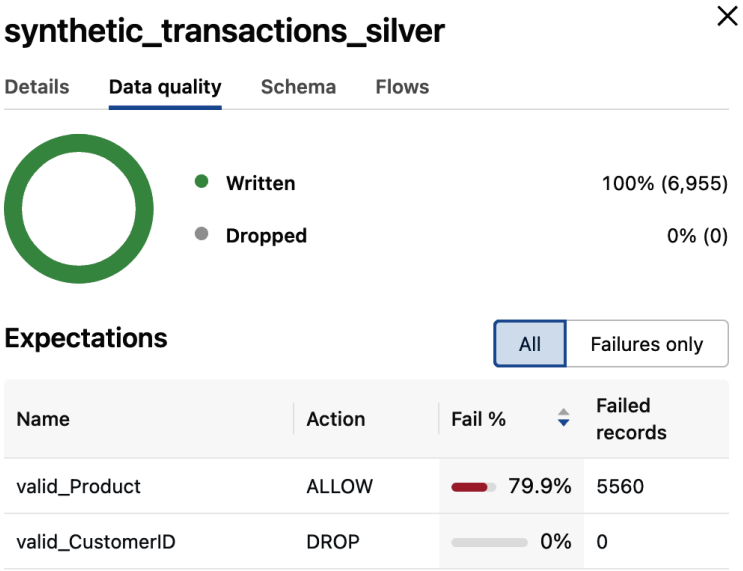


Figure 4.2 – The DLT data quality visualizations

These insights illustrate how expectations help automatically clean up our tables and flag information that might be useful for data scientists using this table downstream. In this example, we see that all records passed the `valid_CustomerID` expectation, so now we know we don't have to worry about null customer IDs in the table. Additionally, almost 80% of records are missing a `Product` value, which may be relevant for data science and **machine learning** (**ML**) projects that use this data.

Just as we've considered the correctness and consistency of incoming data, we also want to consider how we can expand our data quality oversight to include data drift, for example, when your data's distribution changes over time. Observing data drift is where Databricks Lakehouse Monitoring emerges as a vital complement to DLT, offering a configurable framework to consistently observe and verify the statistical properties and quality of input data.