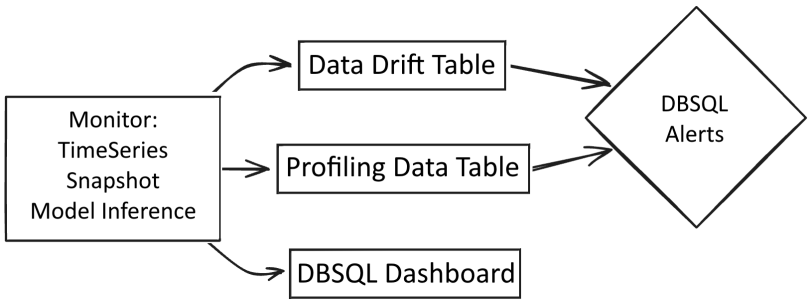


Figure 4.3 – Relationship between the input tables, the metric tables, the monitor, and the dashboard

Creating a monitor

You can create a Databricks Lakehouse Monitor using the **user interface** (**UI**) or, for a more flexible and programmable approach, you can use the API. The API method is particularly advantageous when you want to script the creation of monitors to integrate them into your automated data pipelines. The following is a high-level summary of the steps to create a Lakehouse Monitor using the API:

1. **Choose the profile type**: Decide on the profile type parameter that best suits your monitoring needs. The available types are `Snapshot`, `TimeSeries`, and `Inference`. Each type is suitable for different monitoring scenarios, with the `TimeSeries` and `Inference` types requiring a timestamp column. The inference profile also requires `prediction_col` and `model_id_col`.
2. **Create the monitor**: Use the `lakehouse_monitoring` module to call the `create_monitor` function, providing your table's catalog schema, table name, the chosen profile type, and the output schema for the monitor's results.
3. **Set the schedule**: If you wish to run the monitor at regular intervals, you can specify a schedule using the `MonitorCronSchedule` object, which takes a cron expression and a time zone ID.
4. **Control access**: After you create the monitor, you can manage access to the resulting metrics tables and dashboard using Unity Catalog privileges.
5. **Refresh and review results**: Use the `run_refresh` function to refresh and update the metric tables. You can also check the status of specific runs with the `get_refresh` function and list all refreshes associated with a monitor using `list_refreshes`.
6. **Review monitor settings**: The `get_monitor` function allows you to retrieve your monitor's current settings for review.