iii. **Prediction target**: Choose the specific column in your dataset that you want to predict. The AutoML process will use the other columns in your dataset to try and predict the values in this target column. If you're following along with the Favorita scenario, select **sales**.

Figure 4.11 shows the configuration of an AutoML experiment using the `favorite_train_set` training table. It illustrates how you can customize the AutoML process to fit the specific requirements of your ML task. By selecting the appropriate problem type, dataset, and prediction target, you're instructing the AutoML system on how to approach the model-building process.

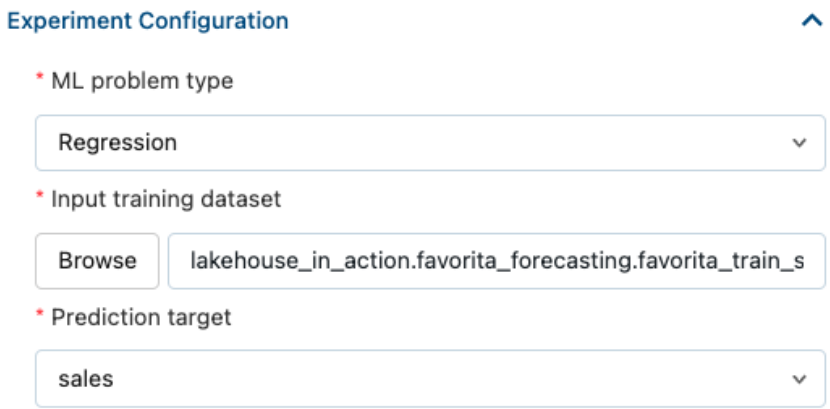


Figure 4.11 – Configuration of an AutoML experiment using the Favorita train_set table

Once you've filled out the UI and specified the Favorita table (or another table of your choice) as your input training dataset, click **Start AutoML** at the bottom of the screen. AutoML experiments may run for up to several hours as improvements in the evaluation metric continue, although you can set a shorter time limit for the experiment by changing the **Timeout** value (found under **Advanced Configuration**). As the experiment begins, a new page will open with progress updates. Once the experiment is complete, you will see links to two data artifacts: the notebook containing the code for the best model, labeled **View notebook for best model**, and the data exploration notebook, labeled **View data exploration notebook**, as shown in *Figure 4.12*.