```
from ydata_profiling import ProfileReport
df_profile = ProfileReport(df,
                           correlations={
                               "auto": {"calculate": True},
                               "pearson": {"calculate": True},
                               "spearman": {"calculate": True},
                               "kendall": {"calculate": True},
                               "phi_k": {"calculate": True},
                               "cramers": {"calculate": True},
                           }, title="Profiling Report", progress_bar=False, infer_dtypes=False)
profile_html = df_profile.to_html()

displayHTML(profile_html)
```

Figure 4.19 – ydata_profiling in the AutoML-created notebook

As shown in *Figure 4.17*, we launched a regression experiment via the API by calling `automl.regress()`. Now, we create another experiment with a forecasting problem type using the UI.

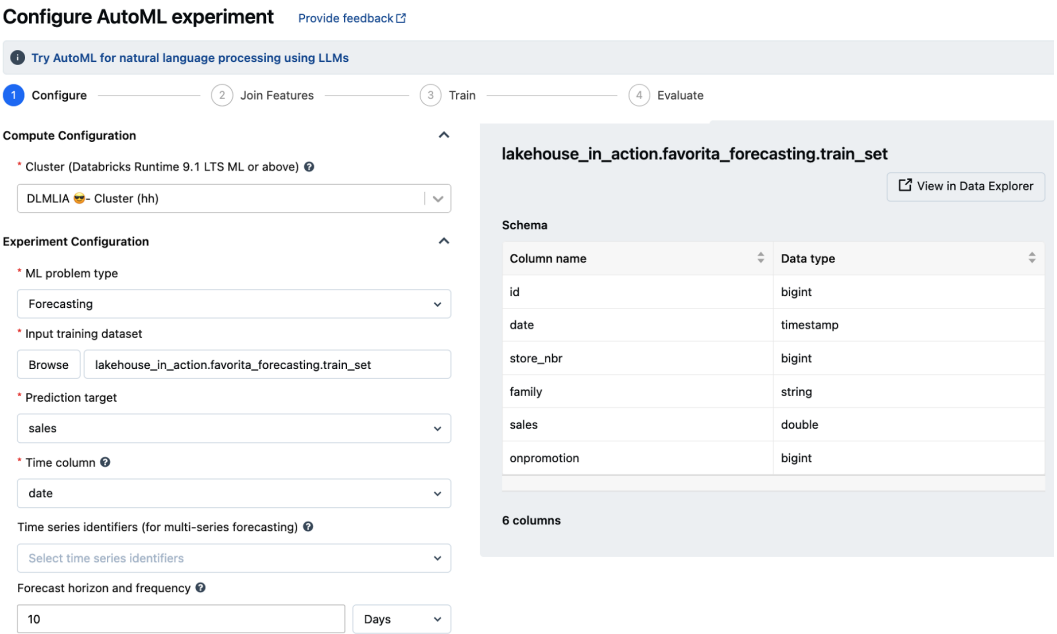


Figure 4.20 – Creating an AutoML forecasting experiment in the UI

When we create an AutoML forecasting experiment, we can incorporate a country's holidays into the model under the **Country Holidays** option in the **Advanced Configuration** section. We will choose **NONE** for this project, because although many countries are present in the drop-down menu, Ecuador is not among them. **NONE** will ensure holidays are not included as a feature in the model.