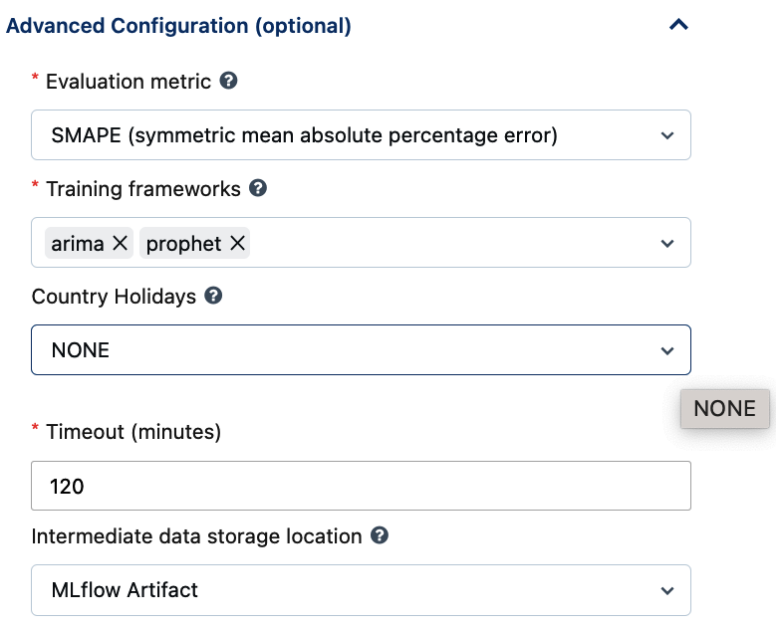


Figure 4.21 – AutoML forecasting experiment advanced configurations

Once all the fields are completed, click **Start AutoML** at the bottom of the screen to run the experiment (adjust the **Timeout** variable down if you want to ensure the run finishes within a given amount of time). When the experiment has finished running, you will see a new screen with a list of generated models.

We have now created an AutoML experiment in a notebook, used AutoML to generate a notebook for EDA, and used AutoML for time-series analysis. Databricks AutoML does a lot of the heavy lifting with minimal code for ML and EDA.

The Favorita sales dataset contains oil prices, which we think could impact sales, so let's augment the autogenerated data exploration with some of our own to explore the oil price data and see how we can use it.

Exploring and cleaning oil price data

To get started with the oil data, open the `CH4-03-Imputing Oil Data` notebook. We use the pandas API on Spark to view the data (*Figure 4.22*). We reindex the data because it's out of order and data for some dates is missing. Notice that initially, the data starts in May 2015 rather than January 2013. Also, the dates May 9th and May 10th appear to be missing.