Project: Streaming Transactions

The synthetic dataset does not need cleaning (since we created it), but we can still explore the data to understand it better. To follow along in your own workspace, please refer to the following notebook:

- `CH4-01-Exploring Synthetic Transactions Data`

Open the notebook to generate visualizations with the `seaborn` library, as shown in *Figure 4.24*.

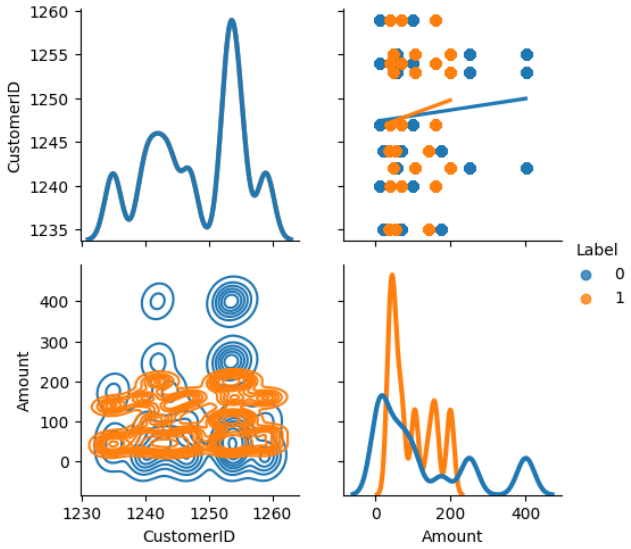


Figure 4.24 – Data visualizations of the synthetic transactions data

Feel free to explore the transaction data further. Next, we'll move on to the RAG chatbot.

Project: RAG Chatbot

In the last chapter, we extracted chunks of text from our PDF documents. We converted those chunks into embeddings using the BGE embedding model. As a result, we are now ready to take the next step in preparing our data for retrieval. To follow along in your own workspace, please refer to the following notebook:

- `CH4-01-Creating VectorDB`

We explained in the *Enhancing data retrieval with Databricks Vector Search* section that Databricks VS is a serverless managed solution. In other words, we need to create the VS endpoint to host our indices.