You can also adjust parameters for the models to improve performance and understand the parameter impact on each model's output. Temperature, Top P, Top K, and maximum number of tokens per response are adjustable via the Playground UI (*Figure 6.6*), and you can also add custom parameters.

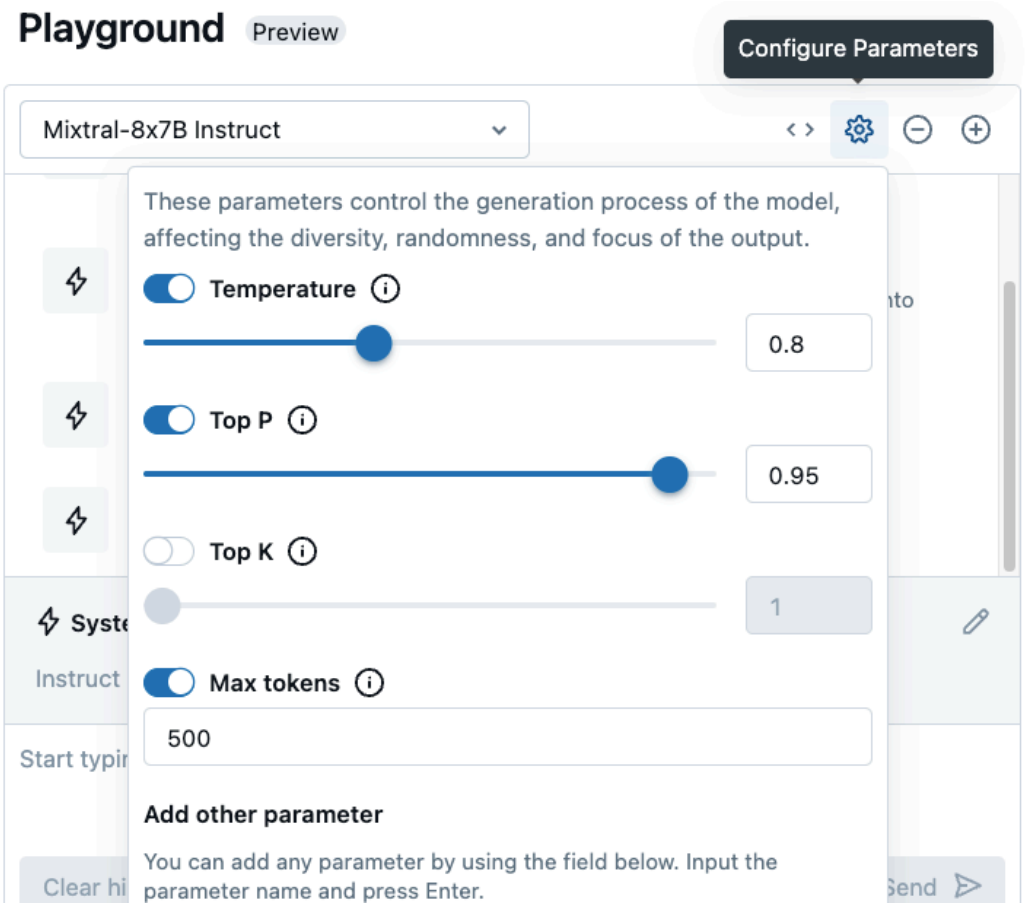


Figure 6.6 – Modifiable parameters in the LLM Playground

Playing around with temperature, for example, can give you more creative and diverse answers. On the other hand, you might end up with something nonsensical if you push the temperature too high. Using the Playground allows you to compare models and parameters to choose the best model for your project. As with everything else in this book, we encourage you to play in the Playground and explore how it might help you with your own prompt engineering and model evaluation work.

Now that we have covered assorted topics around creating training datasets, building baseline models, and integrating external data assets, we are ready to put this into practice with our example projects. Get ready to follow along in your own Databricks workspace as we work through the *Chapter 6* project code.