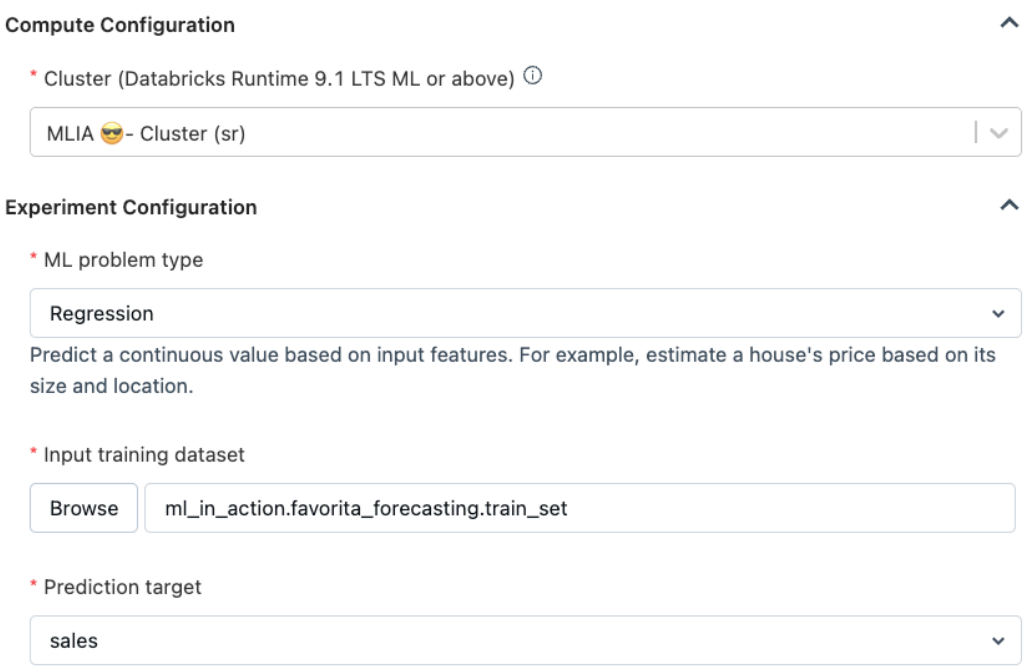



Figure 6.12 – AutoML experiment configuration for the Favorita Sales Forecasting project

Notice that during this experiment, we treat the forecasting problem like a regression problem by selecting the ML problem type as **Regression**. As a result, you also must include the **date** variable in the **Advanced Configuration** section as the **Time column**.

You can use the training dataset you just created, `training_data`, as the **Input training dataset**. You can also choose to use the **Join features** (**optional**) button, where you can add the features tables to be joined to the original `train_set` (see *Figure 6.13*). Notice how using the `_ft` naming convention at the end of our feature table names makes searching for feature tables easier.