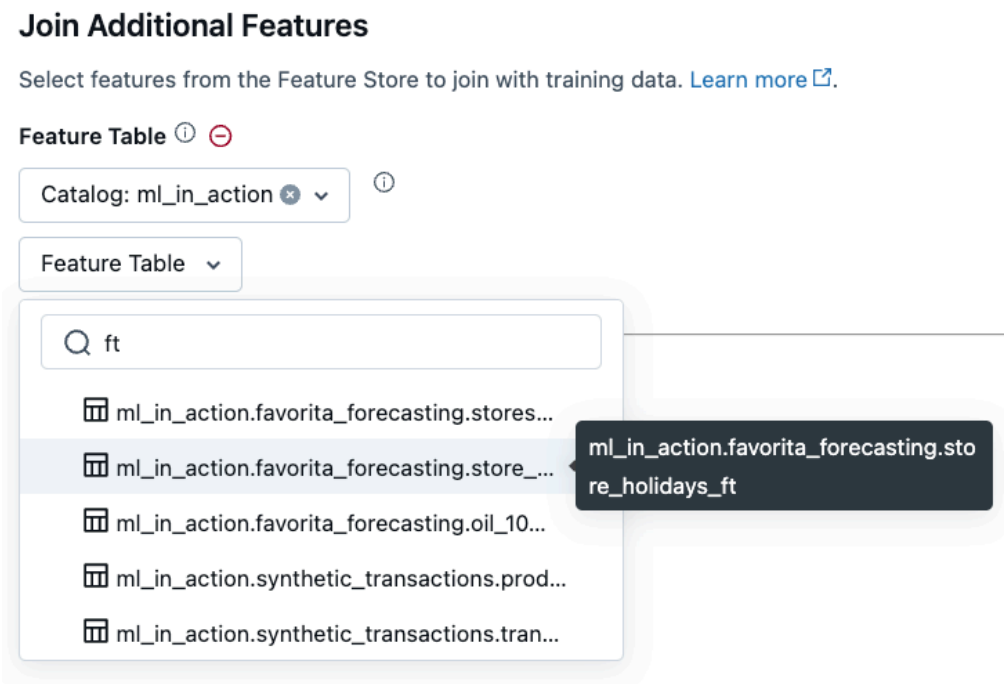


Figure 6.13 – Joining additional features from our feature tables

Once you have your experiment set up, click **Start AutoML** to begin the experiment. When we ran this, the experiment created about 100 runs before reaching the point where it was no longer making progress against the metric of choice, in our case, R-squared, as shown in *Figure 6.14*.

Run Name	Created	Dataset	Duration	Source	Models	val_r2_score	model_type
useful-grouse-161	11 minutes ago	-	8.2s	Noteb...	sklearn	0.854	lightgbm_r...
salty-shad-332	10 minutes ago	-	9.6s	Noteb...	sklearn	0.852	lightgbm_r...
adventurous-deer-223	10 minutes ago	-	9.9s	Noteb...	sklearn	0.851	lightgbm_r...
casual-carp-736	10 minutes ago	-	8.2s	Noteb...	sklearn	0.851	lightgbm_r...
sassy-dove-915	9 minutes ago	-	6.5s	Noteb...	sklearn	0.85	lightgbm_r...
defiant-swan-537	12 minutes ago	-	8.4s	Noteb...	sklearn	0.85	lightgbm_r...
abundant-fly-694	10 minutes ago	-	9.9s	Noteb...	sklearn	0.849	lightgbm_r...
rambunctious-kit-989	9 minutes ago	-	8.6s	Noteb...	sklearn	0.849	lightgbm_r...

Figure 6.14 – AutoML created almost 100 models for Favorita Sales project