Keep in mind that if your endpoint did not exist, it will take a bit of time to deploy.

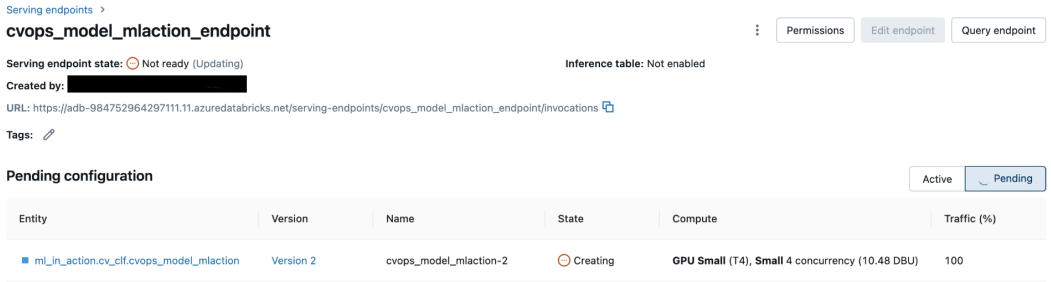


Figure 7.38 – UI example, while the GPU endpoint is deploying/updating

Now we can score our model, and again, for simplicity and reusability, we are covering the serving call into a function `score_model`.

```
def create_tf_serving_json(data):
  return {'inputs': {name: data[name].tolist() for name in data.keys()} if isinstance(data, dict) else data.tolist()}

def score_model(dataset):
  url = f"{db_host}/serving-endpoints/{serving_endpoint_name}/invocations"
  headers = {'Authorization': f'Bearer {db_token}', 'Content-Type': 'application/json'}
  ds_dict = {'dataframe_split': dataset.to_dict(orient='split')} if isinstance(dataset, pd.DataFrame) else create_tf_serving_json(dataset)
  data_json = json.dumps(ds_dict, allow_nan=True)
  response = requests.request(method='POST', headers=headers, url=url, data=data_json)
  if response.status_code != 200:
    raise Exception(f'Request failed with status {response.status_code}, {response.text}')
  return response.json()
```

Figure 7.39 – Defining a model scoring function

Lastly, we scored our model using our model scoring function, as shown in *Figure 7.40*.

```
score_model(df_input)
```

Figure 7.40 – Scoring our model