When using MLflow, you have access to a powerful feature called automatic logging, or autologging. Autologging is excellent because it makes it easy to track the parameters, metrics, and artifacts of your machine learning experiments without explicit instructions.

> **Note**
>
> Auto logging only tracks flavors supported by MLflow. Custom *pyfunc* models are not supported. For more information, check *Further reading*.

MLflow auto logging logs parameter values and models for each run in a single experiment. Every time you train and evaluate your model, MLflow logs your standard metrics and parameters. If you have custom metrics to track with your models, you can also easily add them. We demonstrate tracking custom metrics in *Chapter 6*, when we log parameters for the streaming transactions model.

An admin can enable auto logging for all notebooks attached to interactive clusters at the workspace level. At the cluster level, you can add `spark.databricks.mlflow.autologging.enabled=true` to the advanced section of your cluster configuration to turn on auto logging with a cluster scope. It is less common but possible to enable auto logging within a notebook scope by adding `mlflow.autolog()` to a Python cell in a notebook. Be sure to check the list of modeling flavors supported by autolog.

By default, MLflow saves the tracked items in the managed folder in DBFS (which will be in UC in the future). You can also set `artifact_location` to point to a volume path, which is what we do in the example projects. You also have the option to set the location to another cloud storage location, although doing so eliminates the ability to see your experiments in the MLflow UI.

The MLflow UI makes it incredibly easy to compare each trail; see *Figures 2.7* and *2.8*.

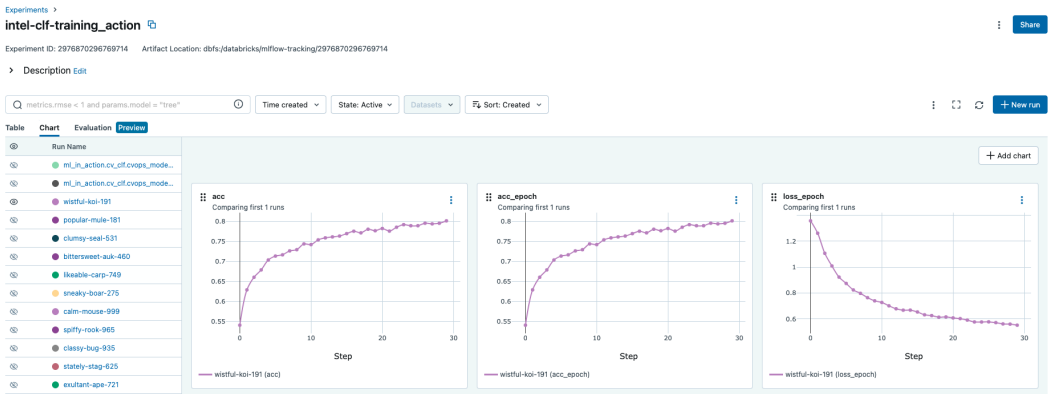



Figure 2.7 – Comparison of experiment runs using the MLflow UI

There are numerous options for visualizing the results of experiments tracked using MLflow.