Applying our learning

This chapter's *Applying our learning* section focuses on getting your Databricks workspace set up and ready for each project we'll be working through. We'll also go over getting set up in Kaggle so that you can download the datasets we will use throughout the rest of this book. Let's get started!

Technical requirements

Before we begin setting up a workspace, please review the technical requirements needed to complete the hands-on work in this chapter:

- We utilize a Python package, `opendatasets`, to download the data we need from the Kaggle API easily.
- We use the Databricks Labs Python library, `dbldatagen`, to generate synthetic data.
- To use the Kaggle API, you must download your credential file, `kaggle.json`.
- A GitHub account is beneficial for connecting Databricks and the code repository for the book (`https://github.com/PacktPublishing/Databricks-ML-In-Action`). In addition to a GitHub account, it is ideal to fork the book repository into your GitHub account. You will see that each chapter has a folder, and each project has a folder under the chapters. We will refer to the notebooks by name throughout the project work.
- We will use the Databricks Secrets API to save both Kaggle and OpenAI credentials. The Secrets API requires the Databricks CLI. We will walk through this setup. However, you will need to create a **personal access token** (**PAT**) on your own for the configuration step: `https://docs.databricks.com/en/dev-tools/auth/pat.html`
- The compute clusters we use are as follows (they vary slightly depending on your data cloud):
  - Single-node CPU configuration

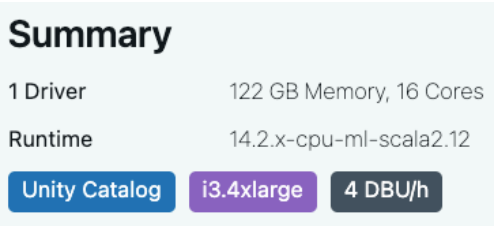


Figure 2.9 – Single-node CPU cluster configuration, DBR ML 14.2

This will work for most workloads in this book.