3. For **Pipeline mode**, select **Triggered**. This will ensure the pipeline stops processing after a successful run.
4. For Paths, select this notebook:

```
Databricks-ML-in-Action/
Chapter 3: Building Out Our Bronze Layer/
Project: Streaming Transactions/
delta_live_tables/
CH3-03-Formatting to Delta with DLT
```

   from the repository for the source code.
5. Select **Unity Catalog** as your **Storage option**.
6. Select `ml_in_action` for the catalog and `synthetic_transactions_dlt` as the **Target schema**.
7. Enter the `table_name` and `synthetic_transactions_dlt` as configurations in the **Advanced** section. Additionally, specify your `raw_data_location` as `/Volumes/ml_in_action/ synthetic_transactions/files/synthetic_transactions`, as shown in *Figure 3.13*.

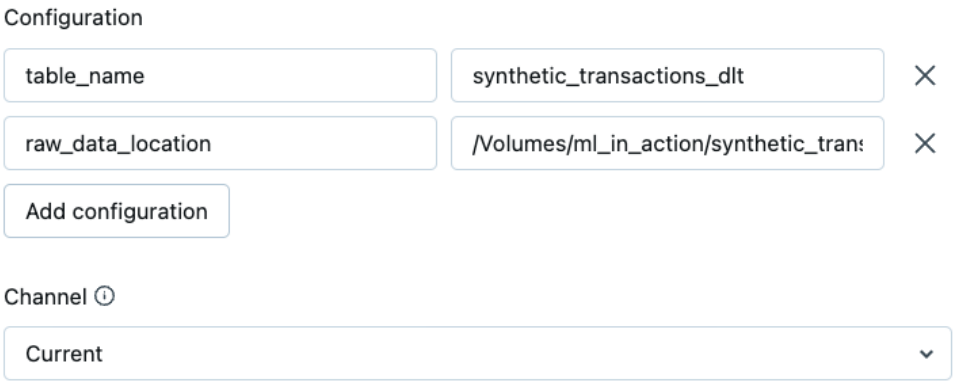


Figure 3.13 – Advanced pipeline configuration settings for variables

Methods in the DLT pipeline

Now that we have filled in the pipeline UI, let's focus on the methods used as the source code of the pipeline. In this function, we mostly reuse our previous code (*Figure 3.14*). You will notice that we do not use the setup file in this notebook. Instead, we use the variables we set in the pipeline settings' advanced configuration section.